



- SHEET NOTES:**
- 1 PROVIDE 40A FUSE FOR STREETLIGHT CIRCUIT AND CONNECT (N) SL CIRCUIT TO THE (E) SL CIRCUIT. SEE SPD PWSF #87,203 FOR WIRING DIAGRAM AND 87,204 FOR WIRES' SPLICING DETAIL AND REQUIREMENT, UON.
 - 2 PROVIDE 10A FUSE FOR STREETLIGHT, UON.
 - 3 R/S (E) SL POLE AND R/C POLE FOUNDATION 3' BELOW GRADE.
 - 4 DISCONNECT (E) SL CIRCUIT. REMOVE AND REPLACE (E) FIXTURE WITH NEW, TYPE AS SHOWN. RECONNECT TO (E) CIRCUITS.
 - 5 REPLACE (E) FIXTURE WITH NEW FIXTURE, TYPE AS SHOWN. PAINT, REFURBISH (E) SL POLE AND ARM.
 - 6 TO BE DEMOLISHED BY PG&E. CONTRACTOR TO NOTIFY PG&E VIA SFPUC-BLHP AFTER STREETScape LIGHTING IN PROJECT AREA IS ACCEPTED BY SFPUC-BLHP.
 - 7 SPLICE TO EXISTING SL CIRCUIT.
 - 8 REFER TO ET SERIES DWG FOR SL CIRCUIT CONNECTION.

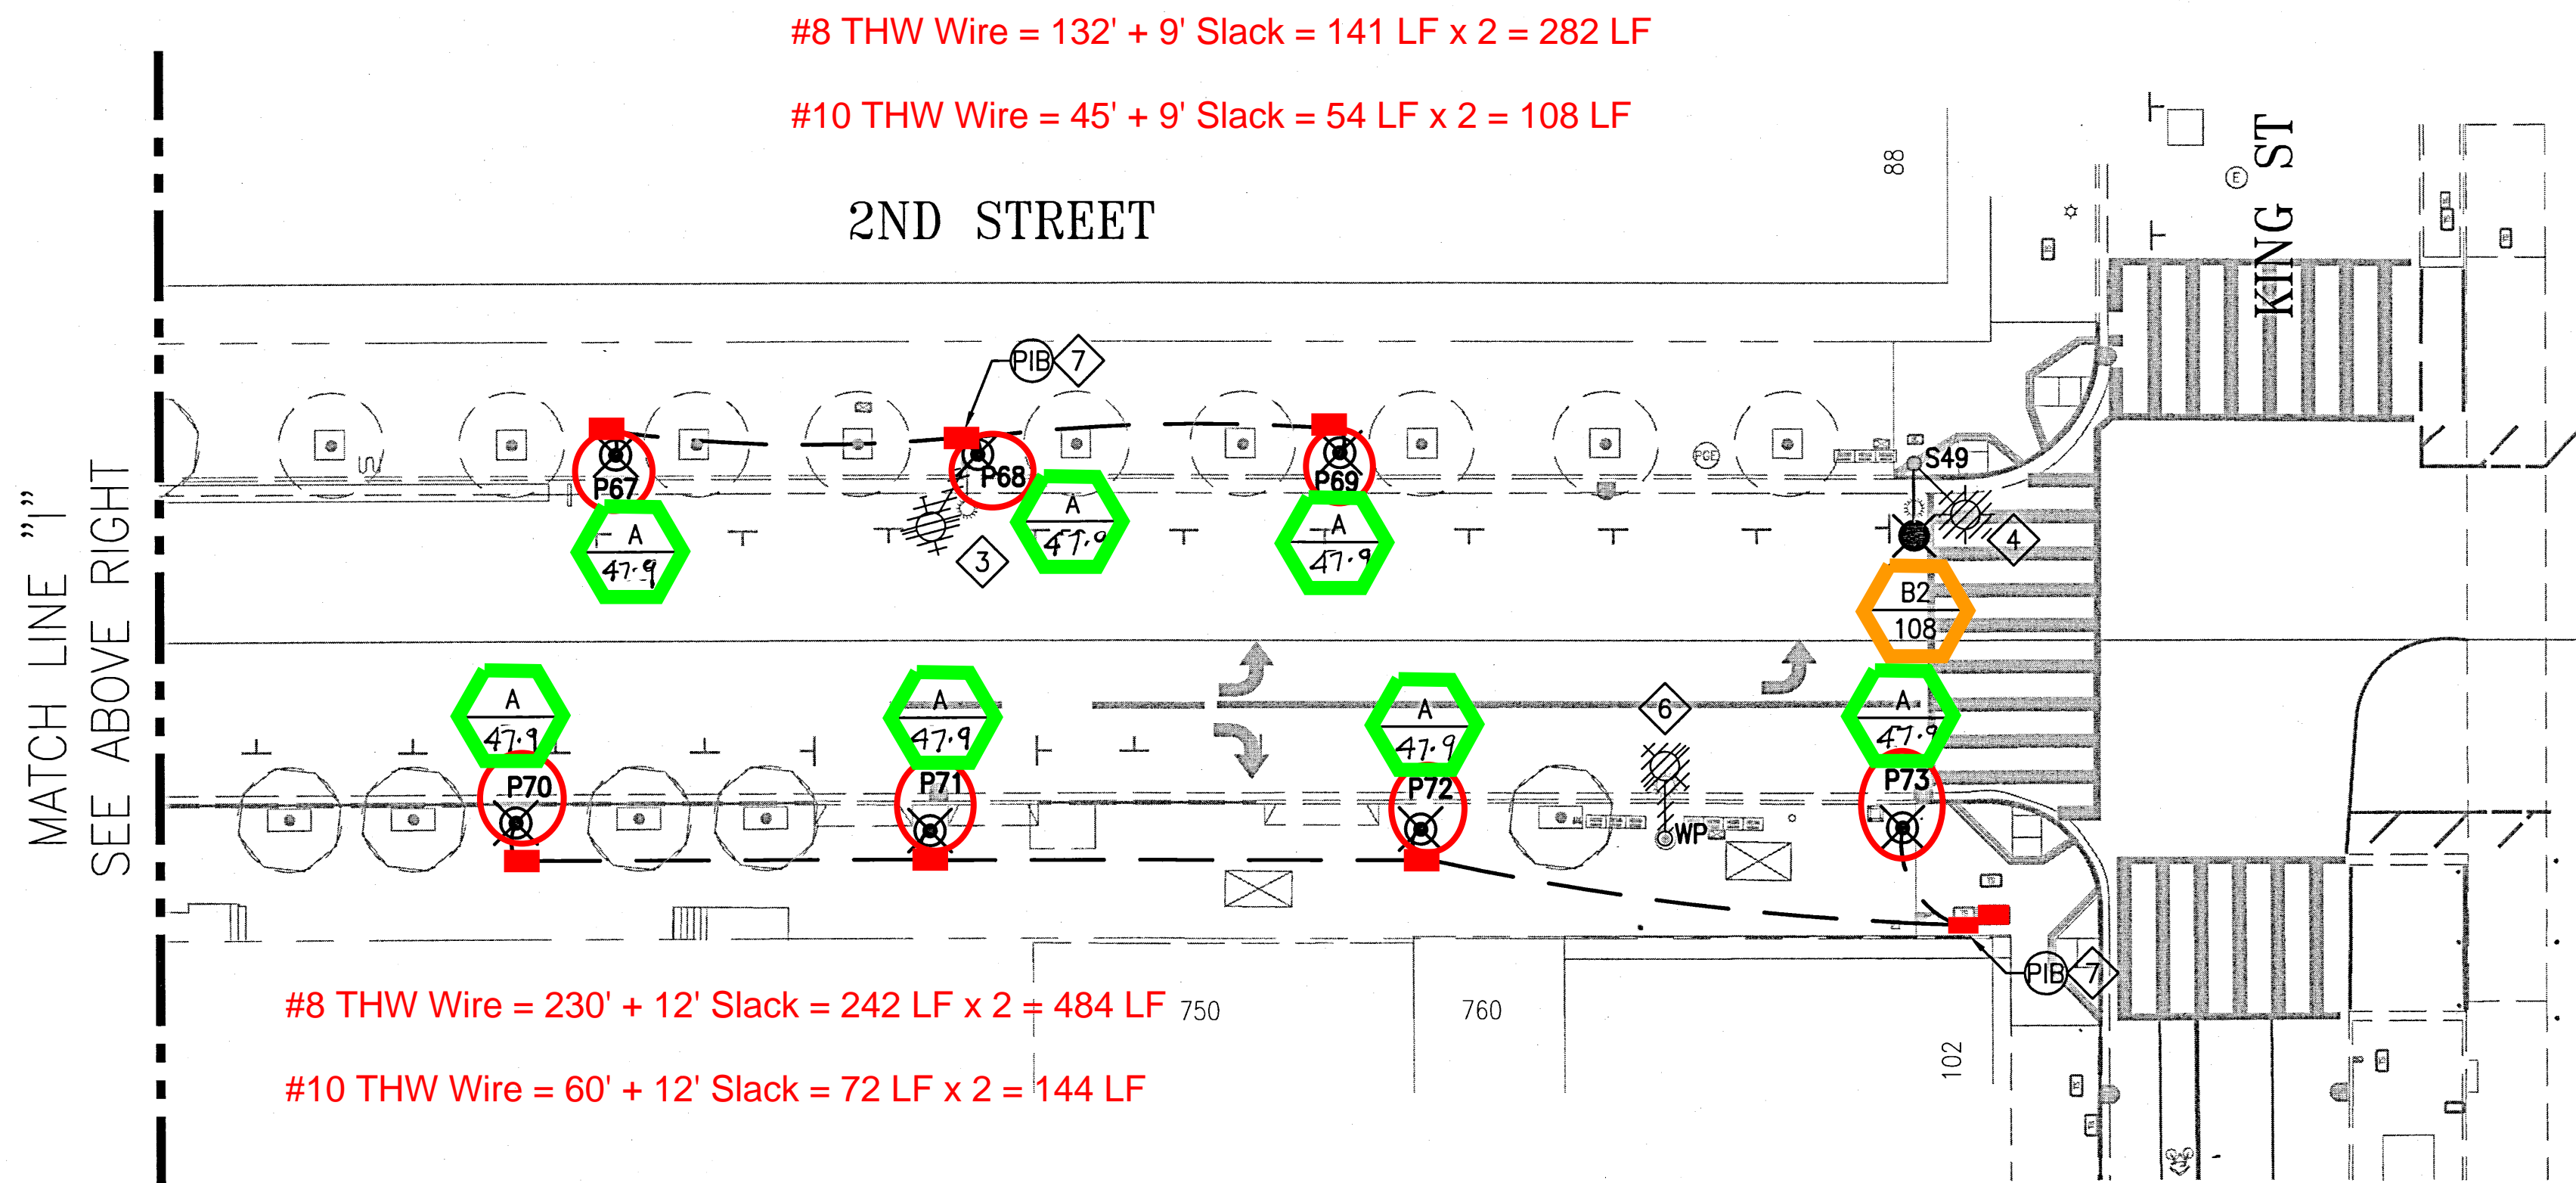

E-1 (Type 'A' Fixture, 14ft Pole & Footing) = 7 EA
 E-6 (Type 'B2' 108W Fixture) = 4 EA
 E-14 (F/I #8 THW Wire) = (282 + 484) 766 LF
 E-15 (F/I #10 THW) = (108 + 144) 252 LF



<table border="1"> <thead> <tr> <th>NO.</th> <th>DATE</th> <th>DESCRIPTION</th> <th>BY</th> <th>APP.</th> </tr> </thead> <tbody> <tr> <td colspan="5">THIS DRAWING WAS LAST MODIFIED: 09/23/16 14:36, BY: lduong</td> </tr> </tbody> </table>				NO.	DATE	DESCRIPTION	BY	APP.	THIS DRAWING WAS LAST MODIFIED: 09/23/16 14:36, BY: lduong					REFERENCE INFORMATION & FILE NO. OF SURVEYS 		 DESIGN & ENGINEERING PUBLIC WORKS CITY & COUNTY OF SAN FRANCISCO 30 VAN NESS AVENUE, 5TH FLOOR SAN FRANCISCO, CA 94102 - 6028		Section Mgr: <i>Philip Thwin</i> Deputy Division Mgr: <i>Iqbal Dhapa</i> Division Mgr: <i>Patrick Rivera</i> Date: 9/23/16 Date: 27 2016 Date: 9/23/16		DESIGNED: DATE: 09/16 ZH/LD DRAWN: DATE: 09/16 ZH/LD CHECKED: DATE: 09/16 SL 		SCALE: 1" = 20' SHEET OF SHEETS OF		2ND STREET STREETScape IMPROVEMENTS PROJECT STREET LIGHTING PLAN 2ND STREET TOWNSEND STREET TO KING STREET		CONTRACT NO. 1064J (P) DRAWING NO. E-5.0 FILE NO. 106,290 REV. NO.	
NO.	DATE	DESCRIPTION	BY	APP.																							
THIS DRAWING WAS LAST MODIFIED: 09/23/16 14:36, BY: lduong																											

Drawing Path: V:\1064J SECOND STREET STREETScape IMPROVEMENTS\2 Design Working Drawings\1064J E-1.0 Streetscape.dwg
 Plot Time: Fri, 23 Sep 2016 - 2:51pm
 Model Units: Inches