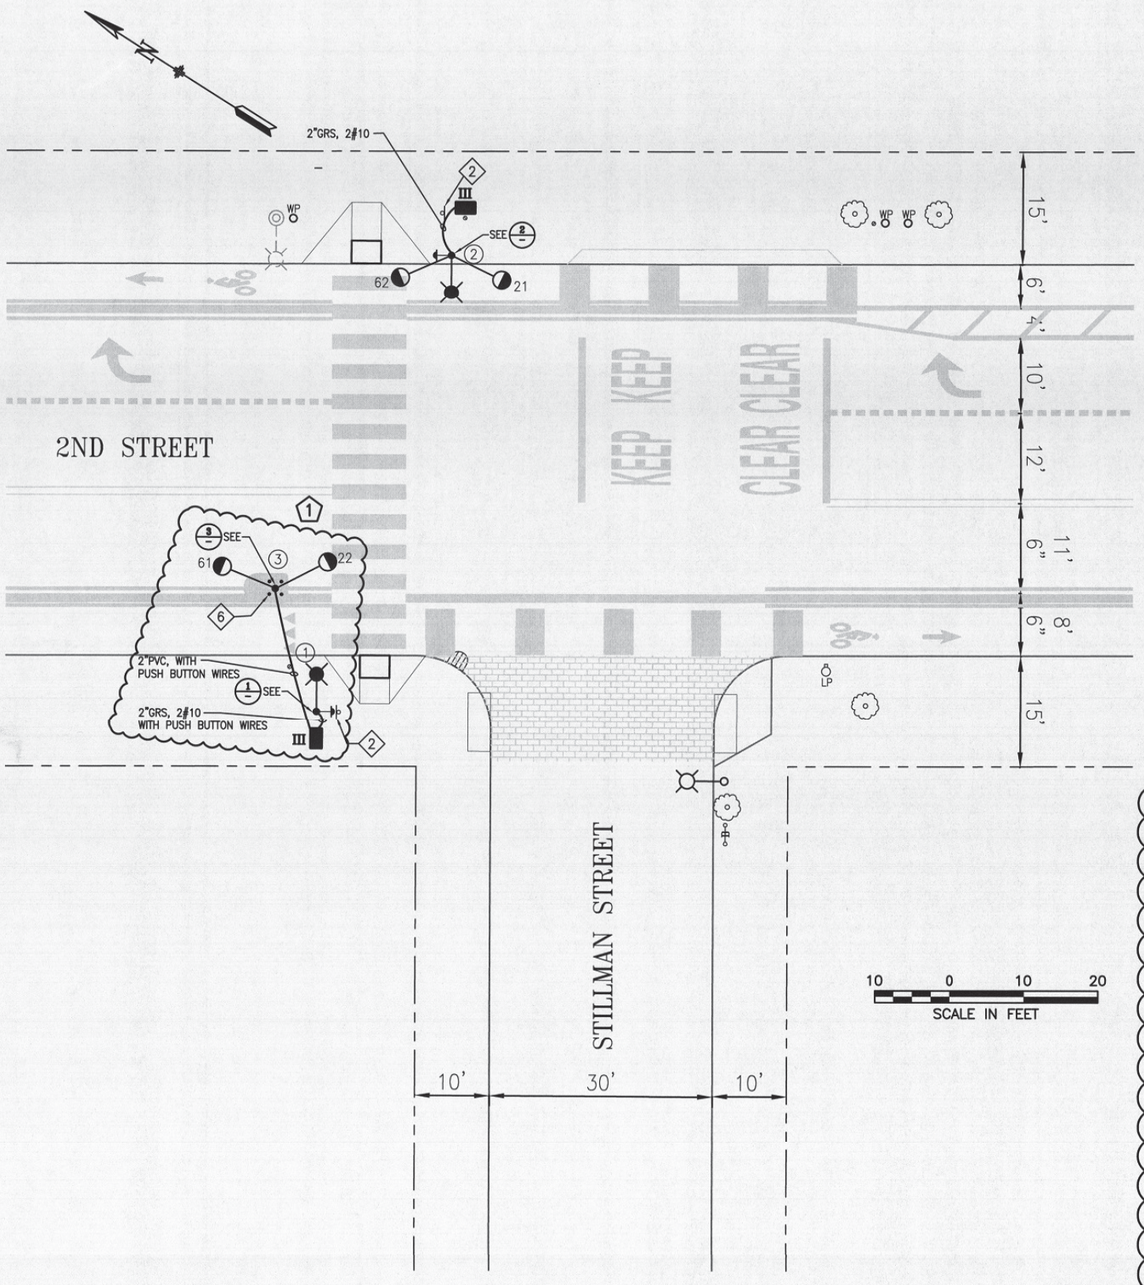

POLE AND EQUIPMENT SCHEDULE

POLE No.	TYPE OF POLE	LUMINAIRE VOLTAGE/ WATTAGE	VEHICLE SIGNAL No.	VEHICLE SIGNAL TYPE	VEHICLE SIGNAL MOUNTING	VISORS	LOUVERS	PEDESTRIAN SIGNAL No.	PEDESTRIAN SIGNAL TYPE	PEDESTRIAN SIGNAL MOUNTING	REMARKS
1	CITY STANDARD STREET LIGHT	4									APS 5
2	CITY STANDARD STREET LIGHT	4	21 62	1	SIDE MOUNT SIDE MOUNT						APS 5 SOLAR POWERED
3	1-A(13')		22 61	1	SIDE MOUNT SIDE MOUNT						SOLAR POWERED

SHEET NOTES:

1. DUAL SIDED RECTANGULAR RAPID FLASHING BEACON WITH SOLAR PANELS, AC ALTERNATE POWER AND YELLOW COLOR FINISHING.
   MANUFACTURE: JSF TECHNOLOGIES
   CAT#: AB-9400 AC, YELLOW COLOR FINISHING
   OR APPROVED.
2. R/S EXISTING SIGN POLE AND RELOCATE SIGNS ONTO POLES 1 & 2 AS APPLICABLE. CONTACT SFMTA SIGN SHOP AT 1508 BANCROFT AVENUE, SAN FRANCISCO; (415) 554-9786 PRIOR TO DELIVERY AND CONTACT TRAFFIC ENGINEER THROUGH THE CITY REPRESENTATIVE FOR SIGN RELOCATION.
3. ASSEMBLY R62E(CA) AND PEDESTRIAN PUSH BUTTON BELOW BEACON TO BE PROVIDED BY CITY FORCES.
4. REFER TO E SERIES DWG AND FIXTURE SCHEDULE E-0.2 FOR LUMINAIRE TYPE, VOLTAGE AND WATTAGE.
5. SOLAR POWER APS BUTTON AND WIRES WITH SAME RATING OF SL PROVIDED BY CITY FORCES.
6. F/I 4 NEW BOLLARDS AROUND POLE 3.

NOTE;
THIS AUTOCAD DRAWING HAS BEEN REVISED AND REPLOTTED SUBSEQUENT TO INTERNAL ENGINEERING APPROVAL AND SIGN-OFF. FOR THOSE SIGNATURES, SEE THE DRAWING PLOTTED AND ISSUED PREVIOUSLY DURING BIDDING. THE SIGNED DRAWING REMAINS VALID EXCEPT FOR THE CHANGES ONLY AS CLEARLY MARKED ON THIS DRAWING AND ISSUED UNDER THIS LATEST REVISION NUMBER AS SHOWN IN THE TABLE OF REVISIONS LOCATED AT THE LOWER LEFT CORNER OF THE DRAWING. ALL ISSUED REVISIONS SUBSEQUENT TO PREVIOUSLY PLOTTED DRAWING DURING BIDDING REMAIN VALID UNLESS SUPERSEDED BY LATER ISSUED REVISIONS. CHECK ALL ISSUED REVISIONS OF THIS DRAWING.

PHASE DIAGRAM



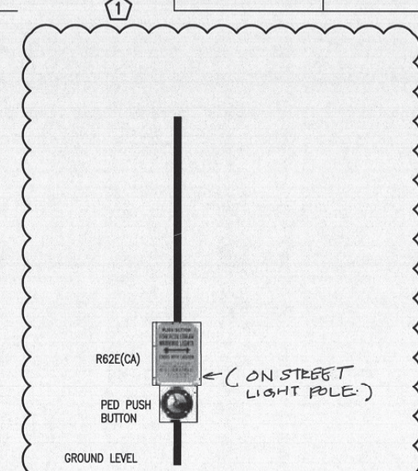

RRFB DETAIL FOR POLE 1 (1/-)
NTS

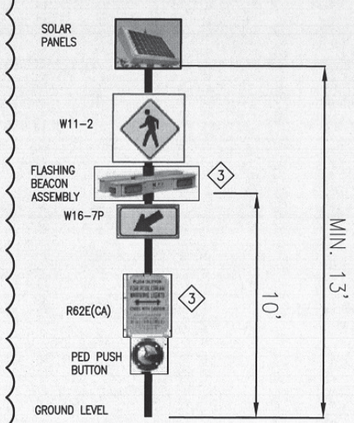

RRFB DETAIL FOR POLE 2 (2/-)
NTS

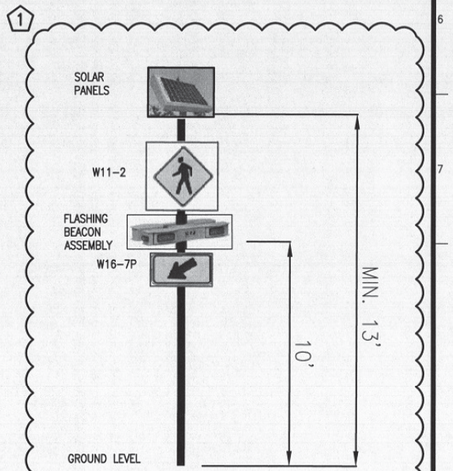

RRFB DETAIL FOR POLE 3 (3/-)
NTS

NO.	DATE	DESCRIPTION	BY	APP.
1	2/5/19	PCO #28 FURNISHING ZONE CHANGES	ST	SL

TABLE OF REVISIONS

REFERENCE INFORMATION & FILE NO. OF SURVEYS

SEAL OF THE CITY AND COUNTY OF SAN FRANCISCO

SAN FRANCISCO PUBLIC WORKS

DESIGN & ENGINEERING
PUBLIC WORKS
CITY & COUNTY OF SAN FRANCISCO
30 VAN NESS AVENUE, 5TH FLOOR
SAN FRANCISCO, CA 94102 - 6028

		Date:
Section Mgr:	Philip Thwin	
Deputy Bureau Mgr:	Iqbal Dhapa	
Bureau Mgr:	Patrick Rivera	

DESIGNED: SS/ZH	DATE: 09/16
DRAWN: SS/ZH	DATE: 09/16
CHECKED: GD/SL	DATE: 09/16

REGISTERED PROFESSIONAL ENGINEER STEVEN T. LEE NO. E15417 ELECTRICAL STATE OF CALIFORNIA 5/22/19

SCALE: AS SHOWN

SHEET OF SHEETS OF

2ND STREET STREETSCAPE IMPROVEMENTS PROJECT

2ND STREET AND STILLMAN STREET TRAFFIC SIGNAL WORK

CONTRACT NO. 1064J
DRAWING NO. ET-5.0
FILE NO. 106,274
REV. NO. 1