

E-2 (Type 'A1' Fixture, 14ft Pole & Footing) = 9 EA  
E-10 (Type I Pullbox) = 12  
E-12 (1.5" GRS in Existing Sidewalk) = P20 to P23 (350LF) + P20 to 29 (250LF) = 600LF  
E-14 (F/I #8 THW Wire) = (724 + 278 + 138 + 132) = 1272LF  
E-15 (F/I #10 THW) = 360 LF

MATCH LINE "D" SEE SHEET E-2.0


MATCH LINE "E" SEE BELOW LEFT

MATCH LINE "E" SEE ABOVE RIGHT

MATCH LINE "F" SEE SHEET E-4.0


SHEET NOTES:

- 1 R/C EXISTING SL BOX. EXTEND ALL EXISTING CONDUITS AND WIRES TO NEW PULL BOX, SIZE TO MATCH THE EXISTING. REFER TO SFDPSF FOR SPLICE CONNECTION REQUIREMENT.
- 2 PROVIDE 10A FUSE FOR STREETLIGHT, UON.
- 3 R/S (E) SL POLE AND R/C POLE FOUNDATION 3' BELOW GRADE.
- 4 REPLACE (E) FIXTURE WITH NEW FIXTURE, TYPE AS SHOWN. PAINT, REFURBISH (E) SL POLE AND ARM.
- 5 STREETLIGHT/TRAFFIC & SIGNAL COMBINATION POLE. REFER TO ET-SERIES DWGS FOR ADDITIONAL ELECTRICAL REQUIREMENT.
- 6 SLICE TO EXISTING SL CIRCUIT.
- 7 REFER TO ET SERIES DWG FOR SL CIRCUIT CONNECTION.
- 8 12 FEET POLE FOR FGP FIXTURE. <sup>A2</sup> <sub>47.9</sub>  
BID ALTERNATE: 14 FEET POLE FOR HI-GLO FIXTURE. <sup>C1</sup> <sub>75</sub>



NO.	DATE	DESCRIPTION	BY	APP.
TABLE OF REVISIONS				
THIS DRAWING WAS LAST MODIFIED: 09/23/16 14:36, BY: lduong				


REFERENCE INFORMATION & FILE NO. OF SURVEYS
--

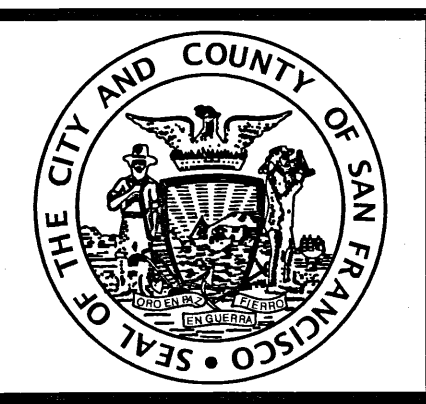

DESIGN & ENGINEERING  
PUBLIC WORKS  
CITY & COUNTY OF SAN FRANCISCO  
30 VAN NESS AVENUE, 5TH FLOOR  
SAN FRANCISCO, CA 94102 - 6028

Section Mgr:	Philip Thwin	Date:	9/23/16
Deputy Division Mgr:	Iqbal Dhapa	Date:	SEP 27 2016
Division Mgr:	Patrick Rivera	Date:	9/23/16

DESIGNED:	DATE:
ZH/LD	09/16
DRAWN:	DATE:
ZH/LD	09/16
CHECKED:	DATE:
SL	09/16

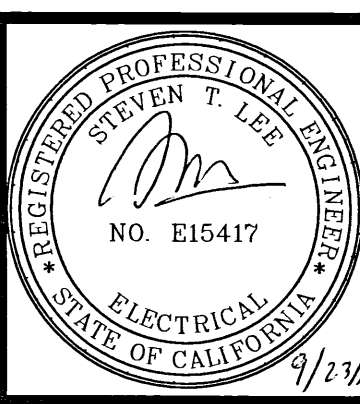

SCALE:
1" = 20'
SHEET OF SHEETS
OF

2ND STREET STREETSCAPE IMPROVEMENTS PROJECT

STREET LIGHTING PLAN  
2ND STREET  
DOW PLACE TO STILLMAN STREET

CONTRACT NO.	1064J (R)
DRAWING NO.	E-3.0
FILE NO.	106,288
REV. NO.	

Drawing Path: V:\1064J\_SECOND\_STREET\_STREETSCAPE\_IMPROVEMENTS\2\_Design\Working\_Drawings\EEL\1064J\_E-1.0\_Dimensions.dwg  
Plot Time: Fri, 23 Sep 2016 - 2:46pm  
Model Units: Inches