



E-9 (Remove...) = 1 EA

- SHEET NOTES:**
- 1 PROVIDE 40A FUSE FOR STREETLIGHT CIRCUIT AND CONNECT (H) SL CIRCUIT TO THE (E) SL CIRCUIT. SEE SPDWISF #87,203 FOR WIRING DIAGRAM AND #87,204 FOR WIRES' SPLICING DETAIL AND REQUIREMENT, UON.
 - 2 PROVIDE 10A FUSE FOR STREETLIGHT, UON.
 - 3 R/S (E) SL POLE AND R/C POLE FOUNDATION 3' BELOW GRADE.
 - 4 DISCONNECT (E) SL CIRCUIT. REMOVE AND REPLACE (E) FIXTURE WITH NEW, TYPE AS SHOWN. RECONNECT TO (E) CIRCUITS.
 - 5 REPLACE (E) FIXTURE WITH NEW FIXTURE, TYPE AS SHOWN. PAINT, REFURBISH (E) SL POLE AND ARM.
 - 6 TO BE DEMOLISHED BY POLE. CONTRACTOR TO NOTIFY POLE VIA SFPUC-BULP AFTER STREETSCAPE LIGHTING IN PROJECT AREA IS ACCEPTED BY SFPUC-BULP.
 - 7 SPLICE TO EXISTING SL CIRCUIT.
 - 8 REFER TO ET SERIES DWG FOR SL CIRCUIT CONNECTION.

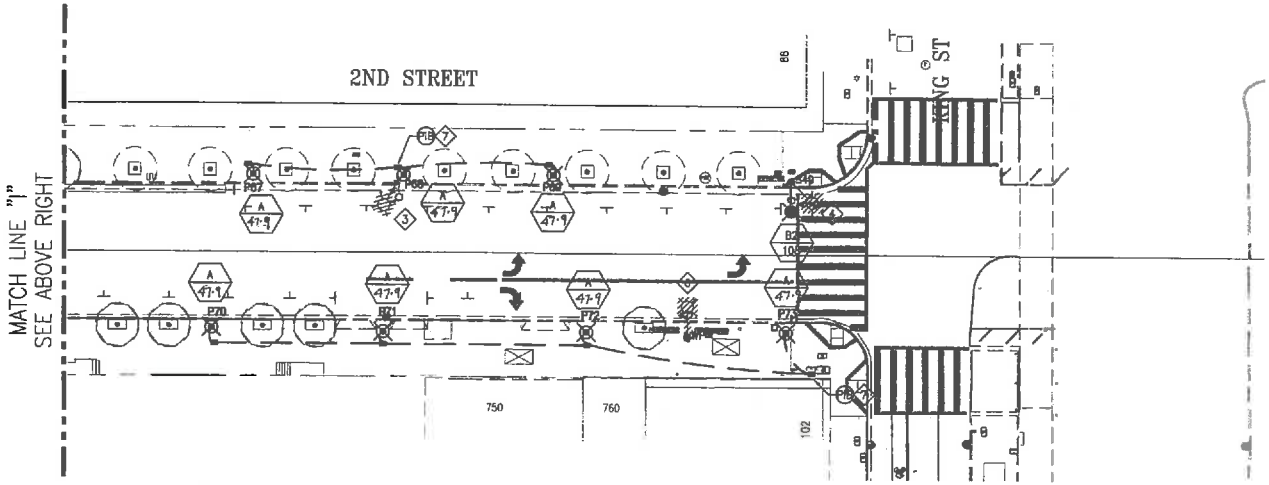

NO.	DATE	DESCRIPTION	BY	APP.
TABLE OF REVISIONS				
THIS DRAWING WAS LAST MODIFIED: 08/23/18 14:38, BY: bloung				

REFERENCE INFORMATION & FILE NO. OF SURVEYS



DESIGN & ENGINEERING
PUBLIC WORKS
CITY & COUNTY OF SAN FRANCISCO
30 VANNESS AVENUE, 8TH FLOOR
SAN FRANCISCO, CA 94102 - 8225

Section Mgr: *[Signature]* Philp Thayer
Deputy Division Mgr: *[Signature]* J. Lopez
Division Mgr: *[Signature]* Patrick Rivera
Date: 9/23/16
Drawing: 212016

DESIGNED: DATE: 09/18
ZHL/D
DRAWING: DATE: 09/16
ZHL/D
CHECKED: DATE: 09/16
SL



SCALE: 1" = 20'
SHEET OF SHEETS

2ND STREET STREETSCAPE IMPROVEMENTS PROJECT
STREET LIGHTING PLAN
2ND STREET
TOWNSEND STREET TO KING STREET

CONTRACT NO. 1064J (E)
DRAWING NO. E-5.0
FILE NO. 106,290
REV. NO.

Drawn By: V:\1064J SECOND STREET STREETSCAPE IMPROVEMENTS\2 Design\Working_Drawing\LEE\1064J.E-1.0 88-End\Design\bloung
Plot Time: 7/1/2016 2:23pm
Model Units: Inches

Xref: V:\1064J SECOND STREET STREETSCAPE IMPROVEMENTS\2 Design\Working_Drawing\LEE\1064J.E-1.0.dwg
V:\1064J SECOND STREET STREETSCAPE IMPROVEMENTS\2 Design\Working_Drawing\LEE\1064J.E-1.0.dwg
V:\1064J SECOND STREET STREETSCAPE IMPROVEMENTS\2 Design\Working_Drawing\LEE\1064J.E-1.0.dwg
V:\1064J SECOND STREET STREETSCAPE IMPROVEMENTS\2 Design\Working_Drawing\LEE\1064J.E-1.0.dwg