



NOTES:


1. ALL STEEL PLANTER EDGING TO BE  $\frac{3}{8}$ " GAUGE WITH 1" CORNER RADIUS, TYP.
2. ALL PLANTER EDGING TO BE STAINLESS STEEL, TYPE 316, TYP.
3. FINISH OF STEEL TO BE DETERMINED THROUGH SUBMITTALS.
4. CONTRACTOR TO SUBMIT SHOP DRAWINGS FOR ALL STEEL PLANTER EDGING.
5. CONTRACTOR TO SUBMIT 12" x 12" SAMPLE OF STEEL EDGING.
6. CONTRACTOR TO PROVIDE MOCK-UP OF ONE PLANTER ON SITE AS SHOWN PER PLANS AND BE APPROVED BY CITY REPRESENTATIVE.
7. ALL STEEL PLANTER EDGING TO BE SMOOTH AND FREE OF SHARP EDGES AT CORNERS.
8. FABRICATOR TO LASER CUT SMALL CIRCLES THROUGH STEEL PLANTER EDGING AT 2' O.C. TYP. SPACING FOR BOLTING PATTERN, TYP. LOCATION OF BOLTING HOLES VARIES, SEE TYPICAL SECTION.
9. TOP OF STEEL PLANTER EDGING TO BE LEVEL, TYP.

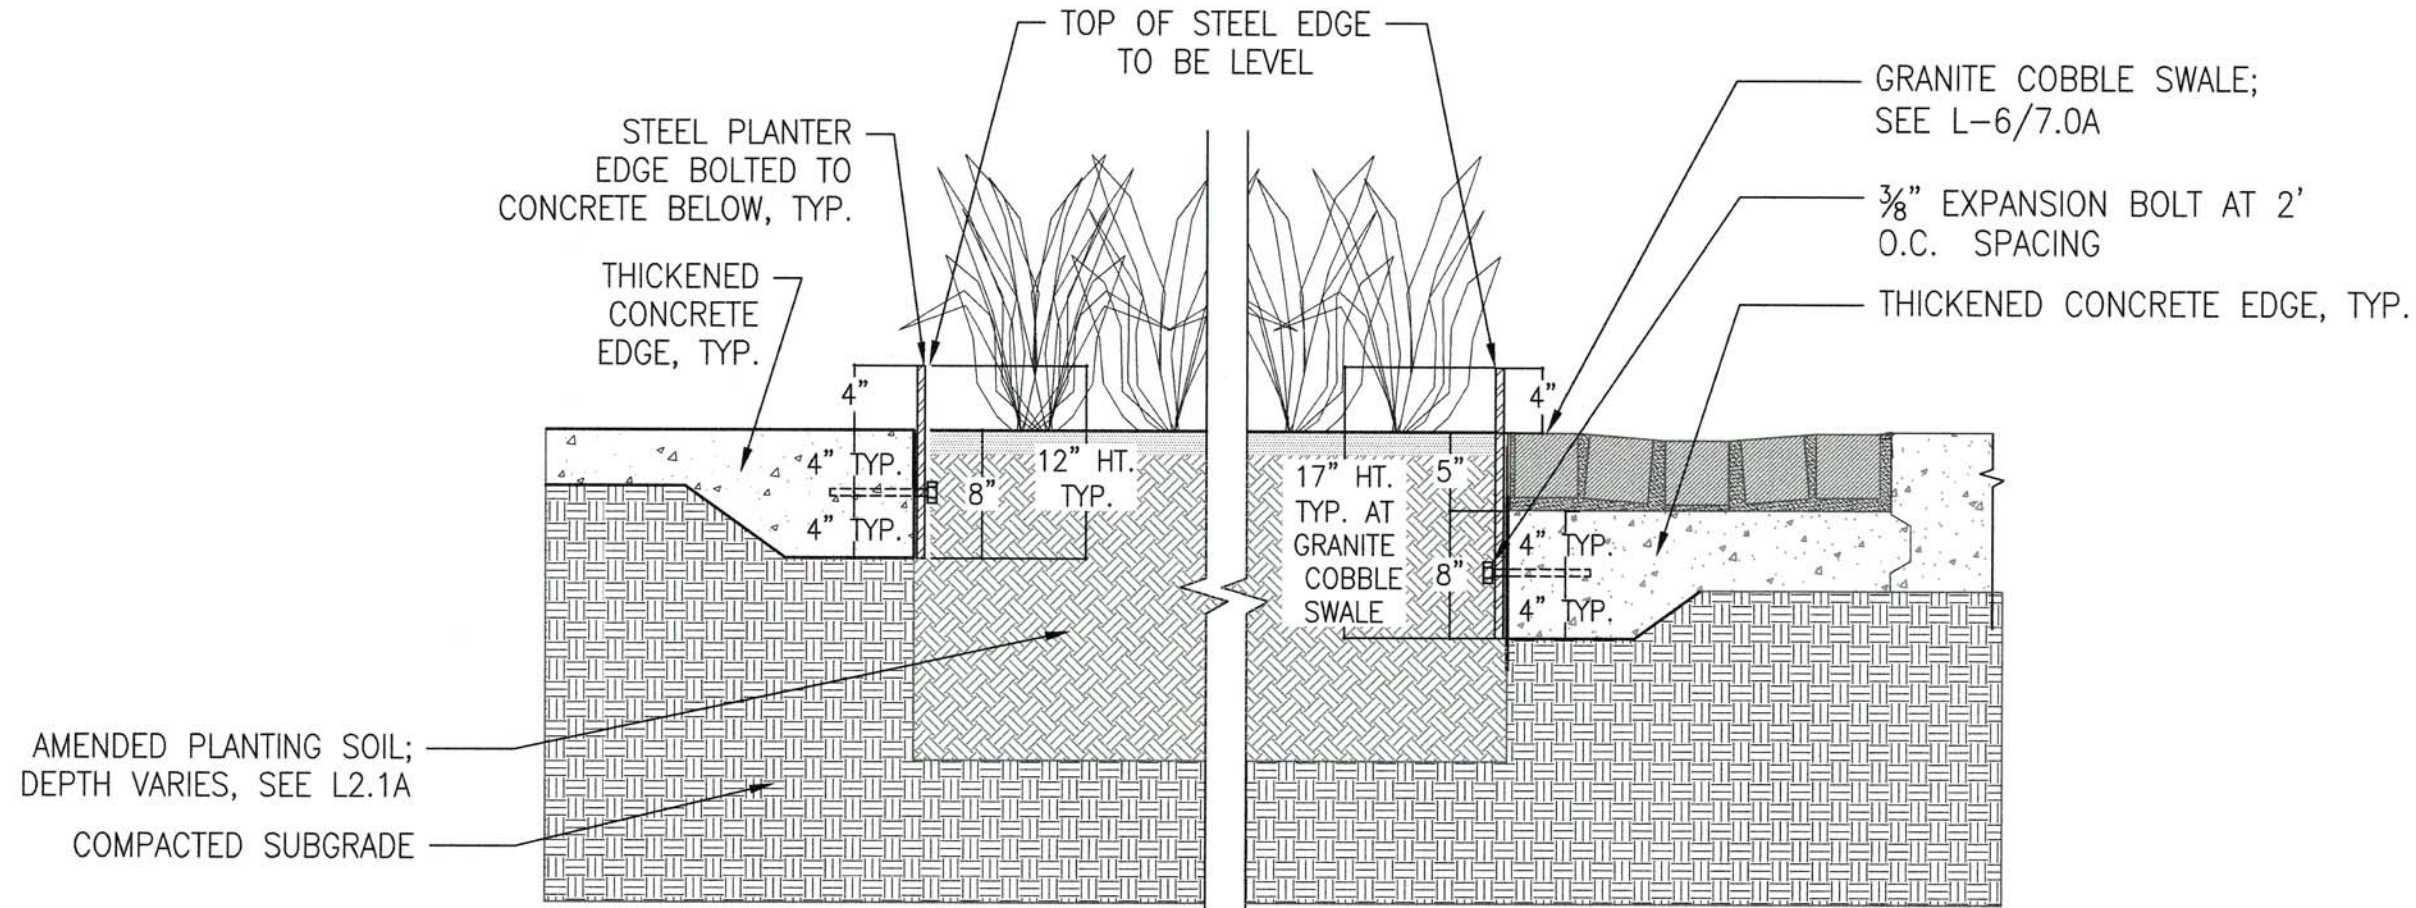

1 STEEL PLANTER EDGE- SECTION  
SCALE: N.T.S.

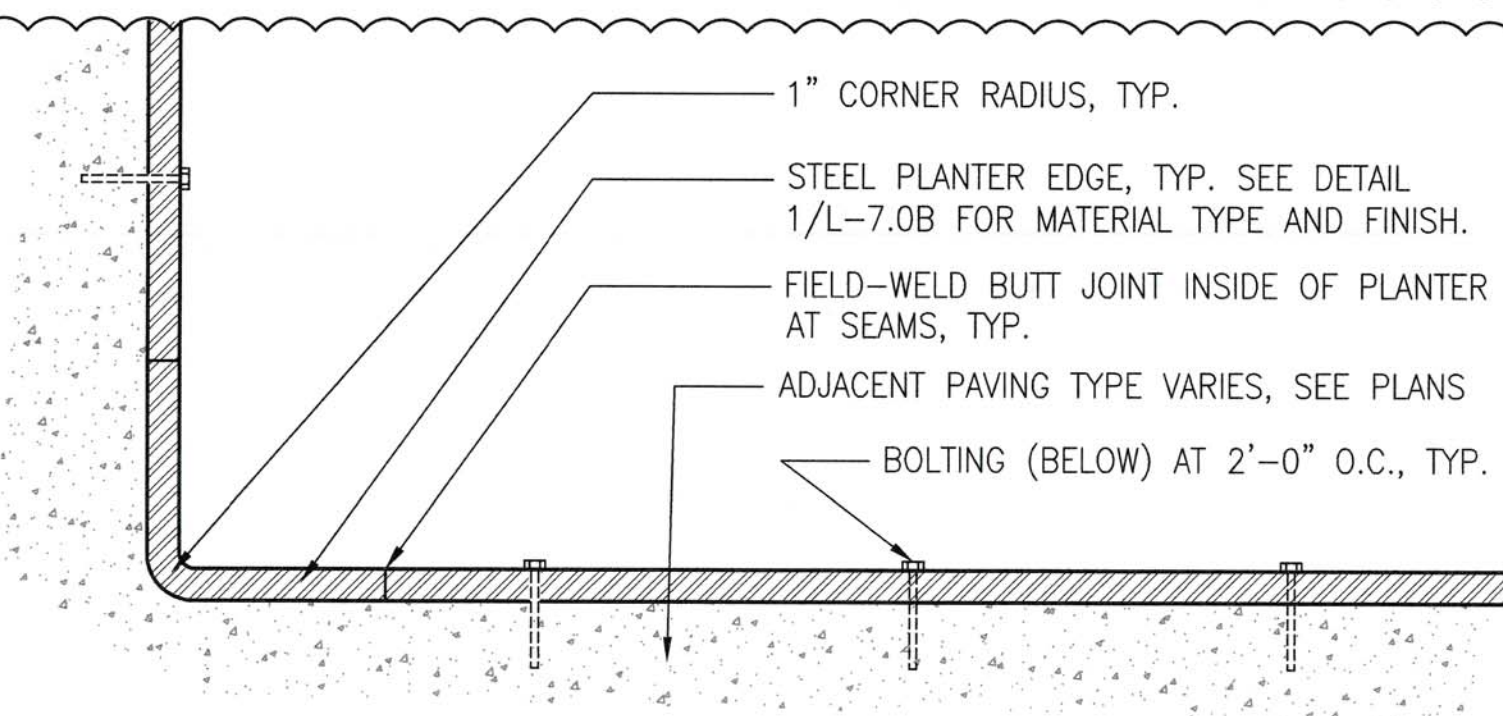

3 STEEL PLANTER EDGE- CORNER ENLARGEMENT  
SCALE: N.T.S.

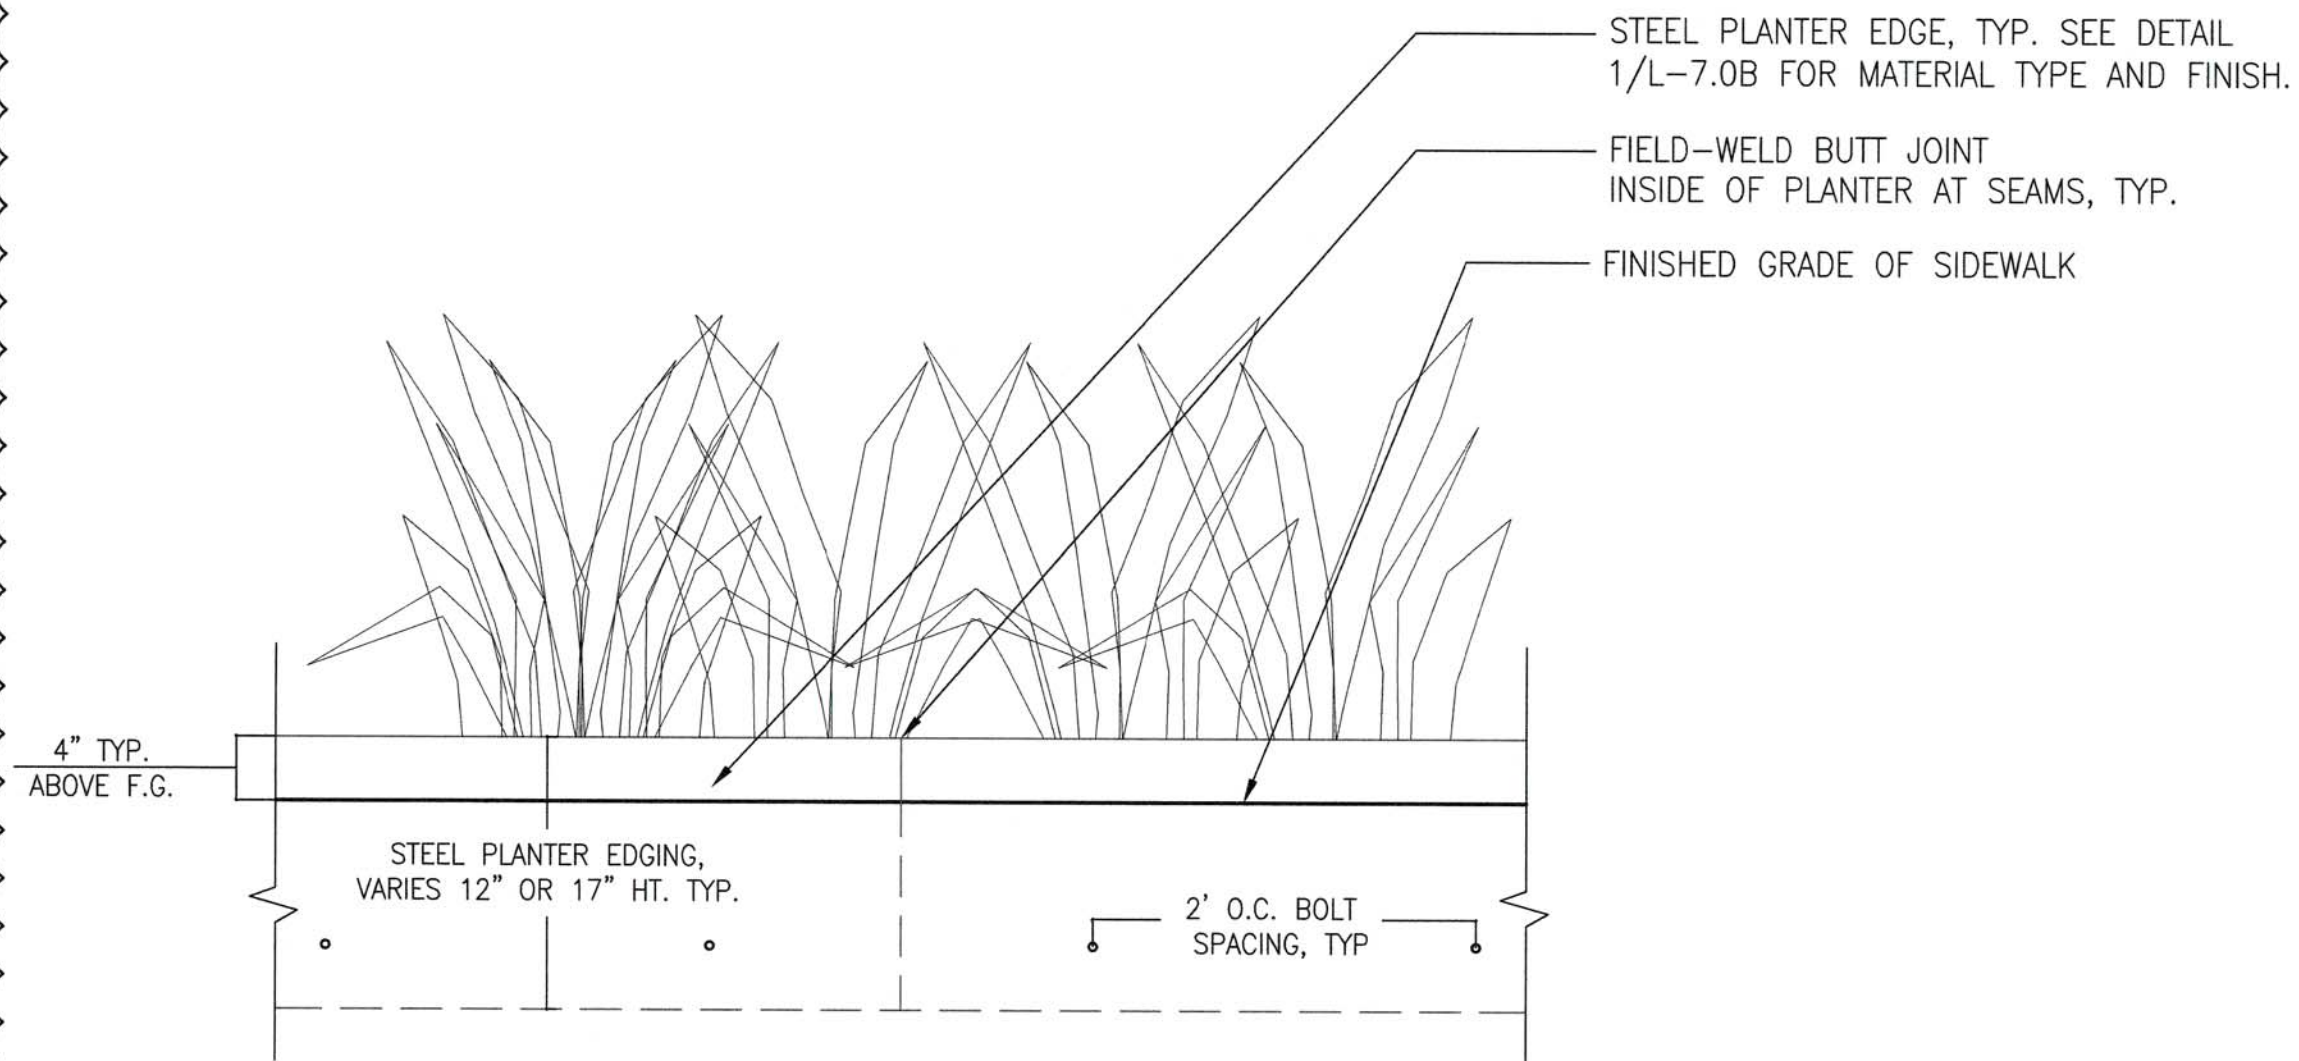

2 STEEL PLANTER EDGE- ELEVATION  
SCALE: N.T.S.

REFER TO DRAWING REVISION 0  
FOR MANAGER SIGNATURES

NO.	DATE	DESCRIPTION	BY	APP.
1	09/18	REMOVE 2ND ST BOLLARDS, ADD DOMES, REVISE SWLK MATERIAL, & DRAINAGE WORK	FC	JD
THIS DRAWING WAS LAST MODIFIED: 09/17/18 08:43, BY: feundy				

REFERENCE INFORMATION  
& FILE NO. OF SURVEYS



BUILDING DESIGN &  
CONSTRUCTION  
PUBLIC WORKS  
CITY & COUNTY OF SAN FRANCISCO  
30 VAN NESS AVENUE, 4TH FLOOR  
SAN FRANCISCO, CA 94102 - 6028

Section Mgr:	Date:
City Architect:	

DESIGNED:	DATE:
JB/SP	3/2018
DRAWN:	DATE:
JB/SP	3/2018
CHECKED:	DATE:



SCALE:
AS NOTED
SHEET OF SHEETS

2ND STREET  
IMPROVEMENTS PROJECT  
NATOMA  
LANDSCAPE CONSTRUCTION DETAILS

CONTRACT NO.
1064J (R)
DRAWING NO.
L-7.0B
FILE NO.
106,241.2
REV. NO.
1