E-6 (Type 'B2' 108W Fixture) = 3 EA
E-7 (Type 'B3' 72W Fixture) = 2 EA

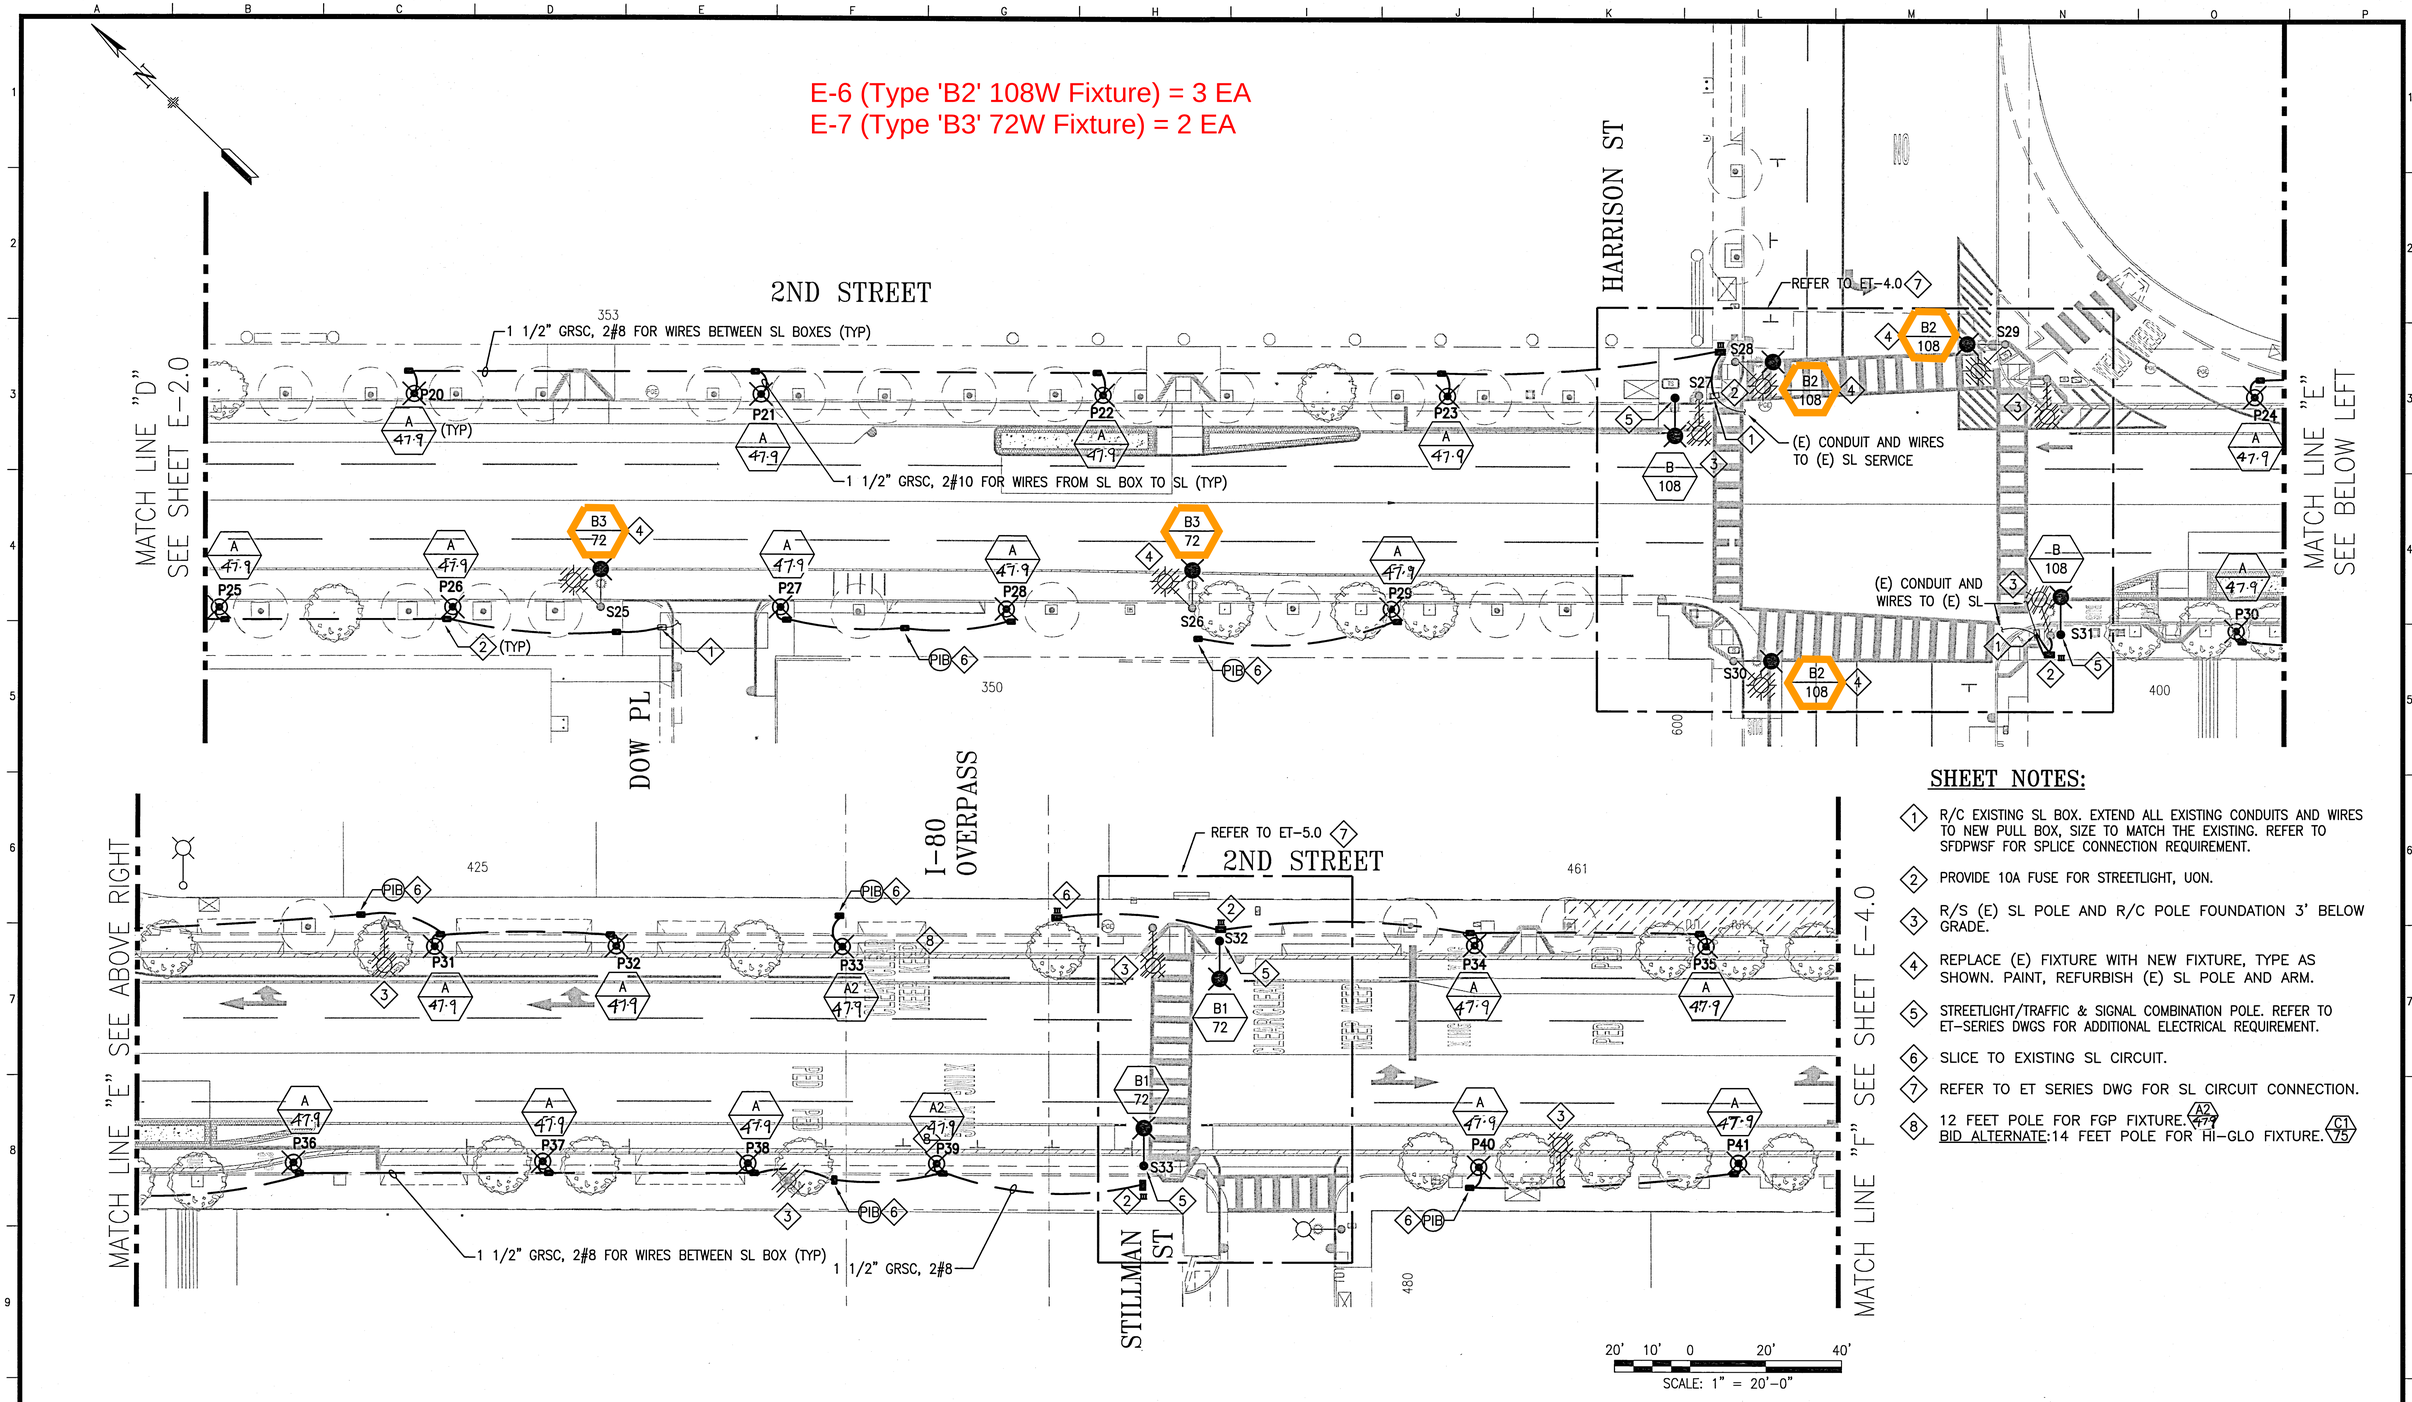

SHEET NOTES:

1. R/C EXISTING SL BOX. EXTEND ALL EXISTING CONDUITS AND WIRES TO NEW PULL BOX, SIZE TO MATCH THE EXISTING. REFER TO SFDPWSF FOR SPLICE CONNECTION REQUIREMENT.
2. PROVIDE 10A FUSE FOR STREETLIGHT, UON.
3. R/S (E) SL POLE AND R/C POLE FOUNDATION 3' BELOW GRADE.
4. REPLACE (E) FIXTURE WITH NEW FIXTURE, TYPE AS SHOWN. PAINT, REFURBISH (E) SL POLE AND ARM.
5. STREETLIGHT/TRAFFIC & SIGNAL COMBINATION POLE. REFER TO ET-SERIES DWGS FOR ADDITIONAL ELECTRICAL REQUIREMENT.
6. SLICE TO EXISTING SL CIRCUIT.
7. REFER TO ET SERIES DWG FOR SL CIRCUIT CONNECTION.
8. 12 FEET POLE FOR FGP FIXTURE. (A2 / 47.9)
   BID ALTERNATE: 14 FEET POLE FOR HI-GLO FIXTURE. (C1 / 75)

NO.	DATE	DESCRIPTION	BY	APP.

TABLE OF REVISIONS
THIS DRAWING WAS LAST MODIFIED: 09/23/16 14:36, BY: lduong

REFERENCE INFORMATION & FILE NO. OF SURVEYS

SEAL OF THE CITY AND COUNTY OF SAN FRANCISCO

SAN FRANCISCO PUBLIC WORKS

DESIGN & ENGINEERING
PUBLIC WORKS
CITY & COUNTY OF SAN FRANCISCO
30 VAN NESS AVENUE, 5TH FLOOR
SAN FRANCISCO, CA 94102 - 6028

		Date:
Section Mgr:	Philip Thwin	9/23/16
Deputy Division Mgr:	Iqbal Dhapa	SEP 27 2016
Division Mgr:	Patrick Rivera	09/27/16

DESIGNED:	DATE:
ZH/LD	09/16
DRAWN:	DATE:
ZH/LD	09/16
CHECKED:	DATE:
SL	09/16

REGISTERED PROFESSIONAL ENGINEER STEVEN T. LEE NO. E15417 ELECTRICAL STATE OF CALIFORNIA 9/23/16

SCALE: 1" = 20'

SHEET OF SHEETS OF

2ND STREET STREETSCAPE IMPROVEMENTS PROJECT

STREET LIGHTING PLAN 2ND STREET DOW PLACE TO STILLMAN STREET

CONTRACT NO. 1064J (R2)
DRAWING NO. E-3.0
FILE NO. 106,288
REV. NO.

Xrefs: V:\1064J_SECOND_STREET_STREETSCAPE_IMPROVEMENTS\2_Design\Working_Drawings\EEL\Xref\BDC_TBD.dwg
V:\1064J_SECOND_STREET_STREETSCAPE_IMPROVEMENTS\2_Design\Working_Drawings\EEL\Xref\1064J_L_BASE.dwg
V:\1064J_SECOND_STREET_STREETSCAPE_IMPROVEMENTS\2_Design\Working_Drawings\EEL\Xref\1064J_R_BASE.dwg
V:\1064J_SECOND_STREET_STREETSCAPE_IMPROVEMENTS\2_Design\Working_Drawings\EEL\Xref\1064J_L_EXST.dwg

Drawing Path: V:\1064J_SECOND_STREET_STREETSCAPE_IMPROVEMENTS\2_Design\Working_Drawings\EEL\1064J_E-1.0 Plot Time: Fri, 23 Sep 2016 - 2:46pm
Plot Scale: 1:1 Plot Date: 09/23/16 Plotted By: lduong
Model Units: Inches