



TRAFFIC CONTROL PLAN
1064J - 2ND ST IMPROVEMENTS PROJECT
CURB RAMP WORK PLAN - 2ND ST FROM MARKET ST TO MISSION ST

STREET	TIME	NORTHBOUND	SOUTHBOUND	EASTBOUND	WESTBOUND
2ND STREET					
Market St to King St	8AM - 5PM (M-F)	1@12'	1@12'	-	-
(MC)	8AM - 6PM (S/S)	1@12'	1@12'	-	-
	At Other Times	Full Roadway	Full Roadway	-	-
Cross Streets for 2nd Street					
Market St (CC, MC, TC)	At All Times	-	-	Full Roadway	Full Roadway
Stevenson St	8AM - 5PM (M-F)	-	-	Closed	-
	8AM - 6PM (S/S)	-	-	Closed	-
	At Other Times	-	-	Full Roadway	-
Jessie St	8AM - 5PM (M-F)	-	-	Closed	-
	8AM - 6PM (S/S)	-	-	Closed	-
	At Other Times	-	-	Full Roadway	-

WORK HOUR

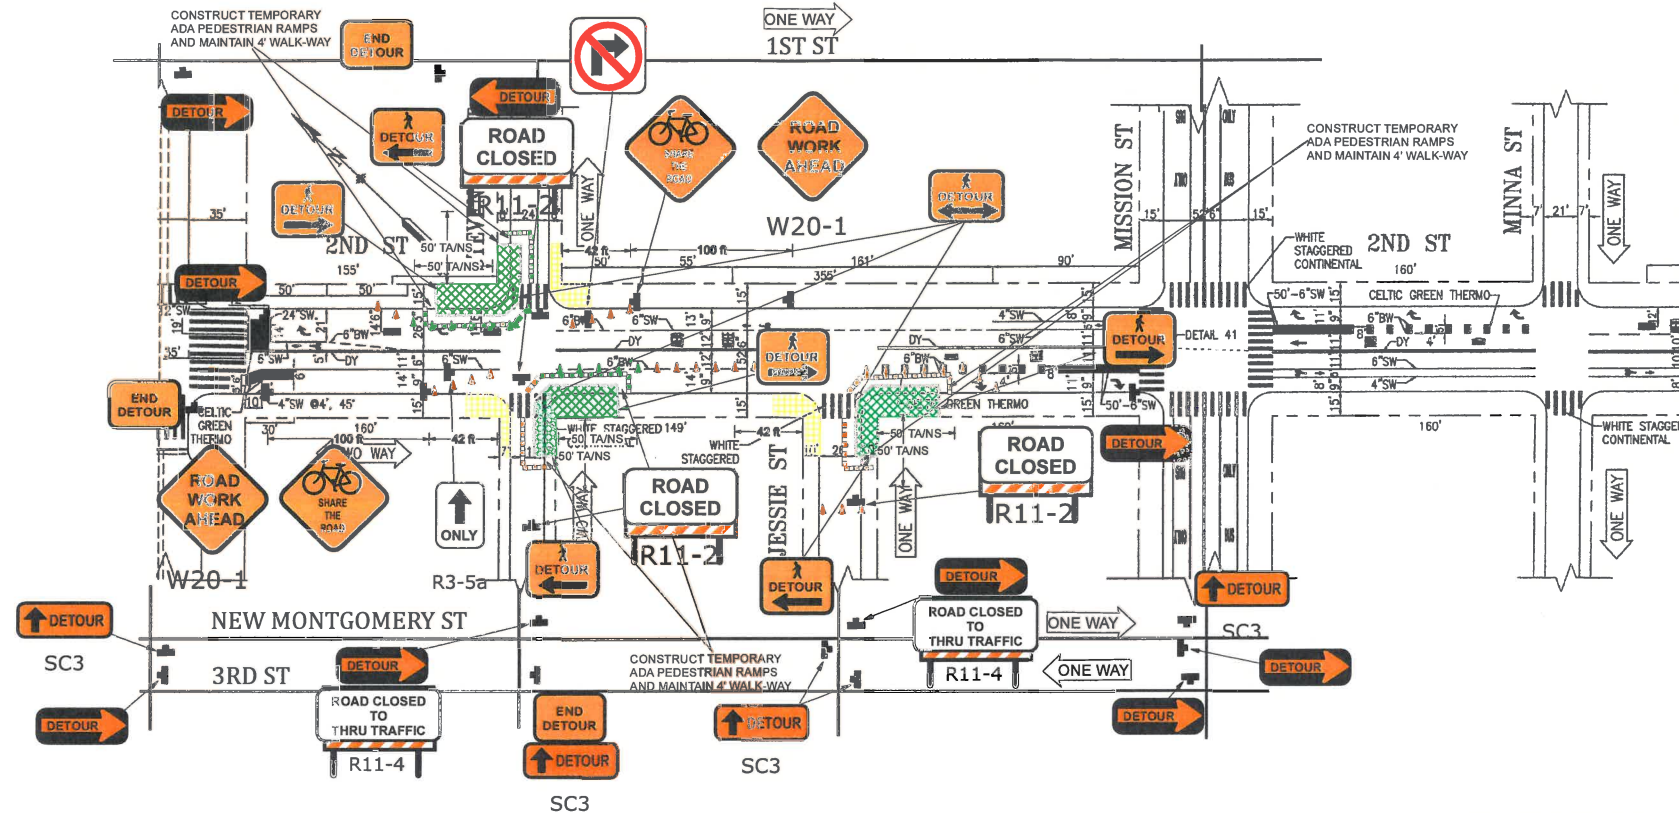

NON-WORK HOUR

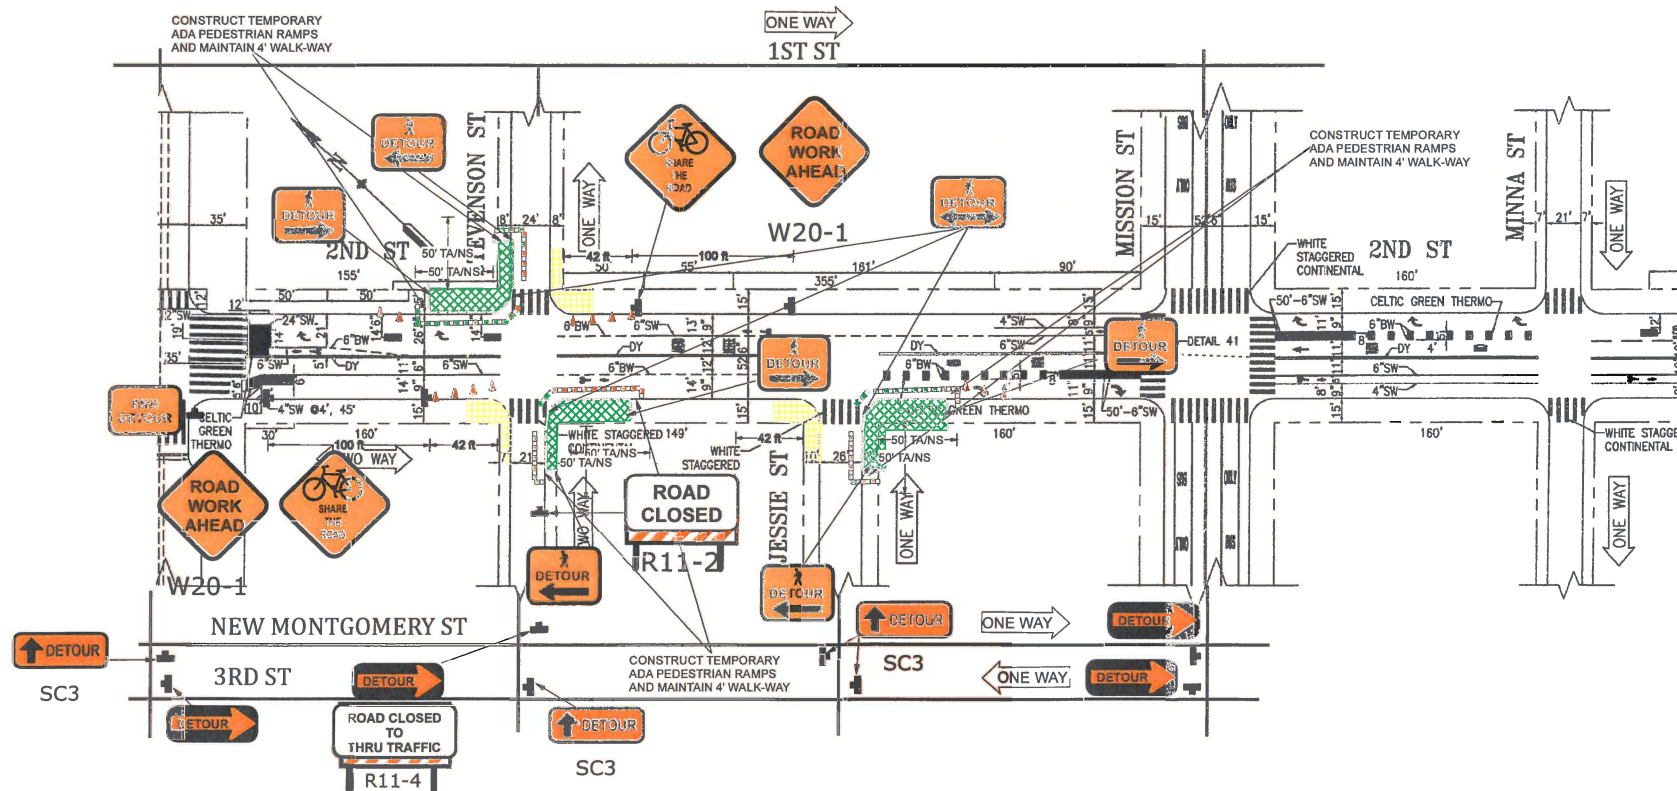















- ☒ NO EXCEPTIONS TAKEN
☐ MAKE CORRECTIONS NOTED
☐ REJECTED
☐ REVISE AND RESUBMIT
☐ SUBMIT SPECIFIED ITEM(S)

Review is only for general conformance with the design concept of the project and general compliance with the requirements of the contract documents. Any action shown is subject to the requirements of the plans and specifications. Contractor's responsibilities include but are not limited to actual dimensions which shall be confirmed and correlated at the job site; preferred fabrication processes and techniques of construction; coordination of the contractor's work with that of all other trades; and the satisfactory performance of the contractor's work.

Sustainable Streets Division
 San Francisco Municipal Transportation Agency
 City and County of San Francisco



Date 12/7/17

Legend	
	Type III Barricade
	28\" data-bbox="215 165 285 205"/>
	Work Area
	Sign and Stand
	Direction of Travel
	Type III Barricade (Plain View)
	ADA Pedestrian Barricades
NTS Not To Scale	
TAVNS Tow-Away/No Stopping	
	Police Officer
	Flagger
	Type I Barricade
	Work Truck
	Pipe to be installed
	Existing Utility
	Flashing Beacon

Plan Scale
 1" = 50'

CMC
Traffic Control
Specialists

3450 3rd St, Suite 3G, San Francisco, CA 94124
 Phone: (415) 206-1700 Fax: (415) 206-1711
 Contractor License No. 792059 (Class A & C-31)

- Date: 11/20/2017 Author: PM/RC Project: 1064J
 Client: M2 Owner: SFPDW Location: SAN FRANCISCO
 TCP: 011 CMC Job #: 1430 REV: 1
- Comments:**
- 1) WORK HOURS:
 - 2) THE CONTRACTOR SHALL BE ALLOWED TO WORK AT A MAXIMUM OF 3 INTERSECTIONS AT ANY TIME.
 - 3) THE CONTRACTOR SHALL NOT PREVENT OR DELAY THE OPERATION OF MASS TRANSIT VEHICLE AT ANY TIME.
 - 4) USE A SIMILAR BUT OPPOSITE CONFIGURATION TO COMPLETE THE YELLOW CURB RAMP SHOWN.