


x3 @ Harrison

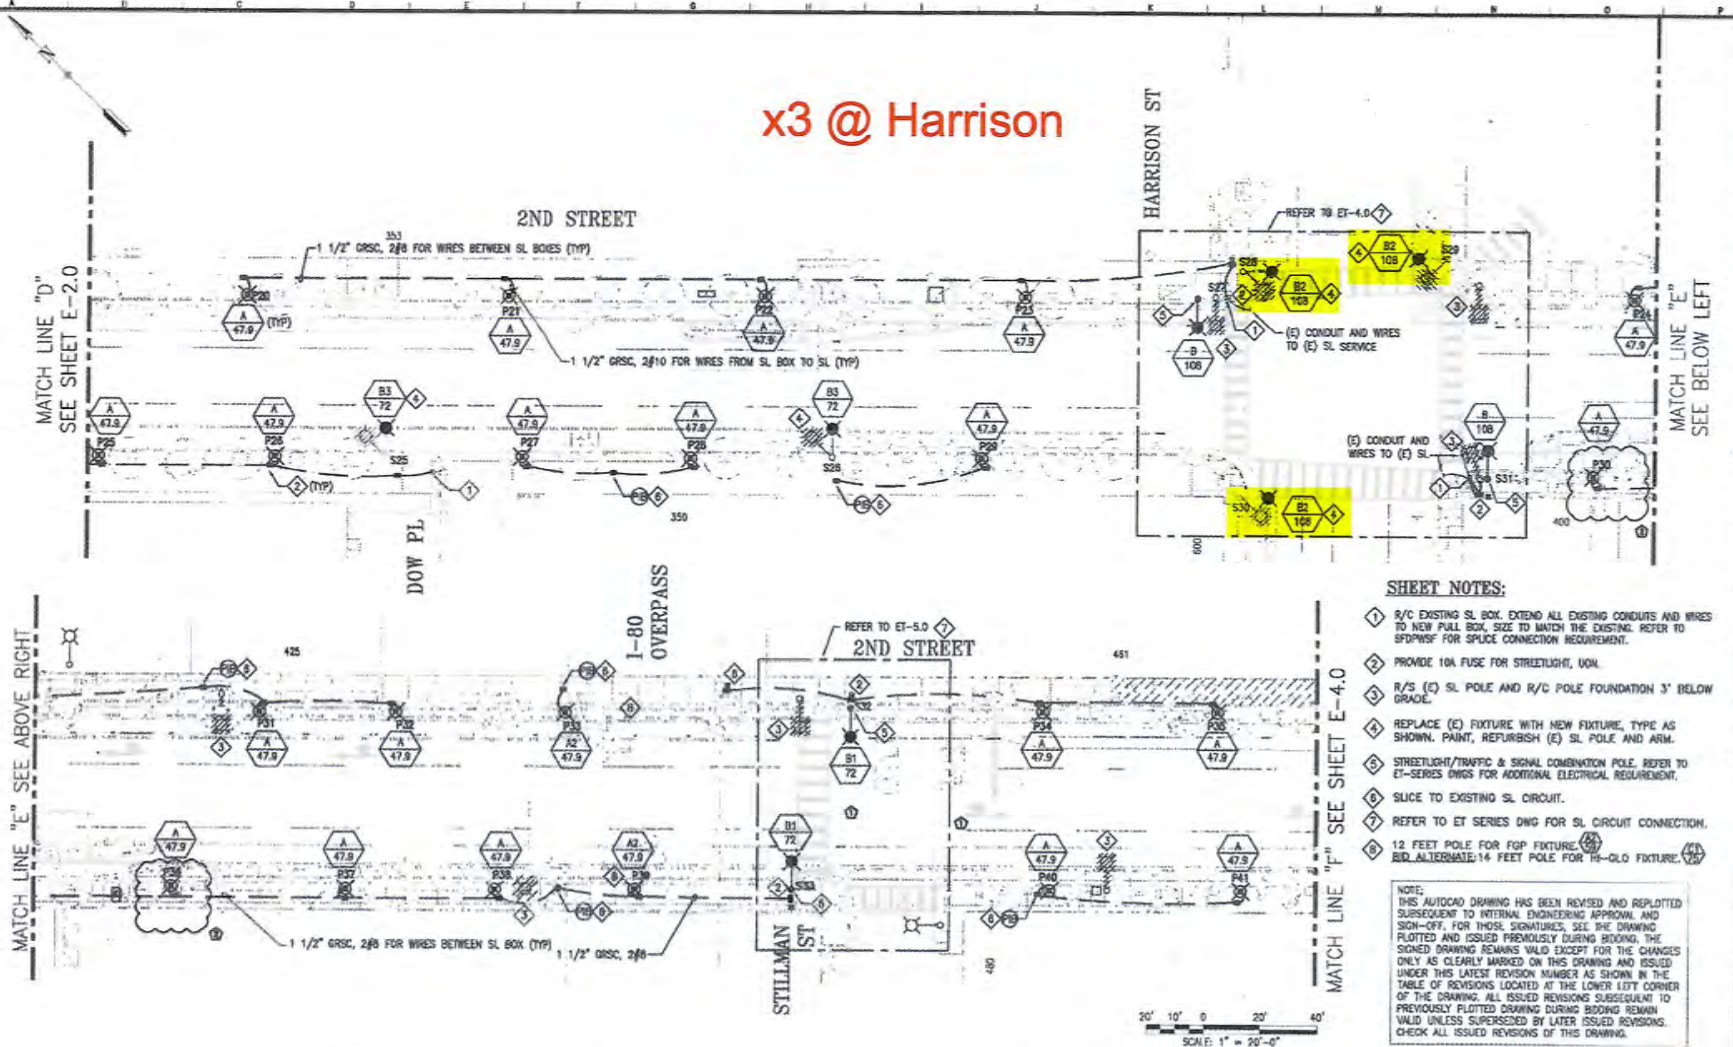

**SHEET NOTES:**

- 1 R/C EXISTING SL BOX. EXTEND ALL EXISTING CONDUITS AND WIRES TO NEW PULL BOX, SIZE TO MATCH THE EXISTING. REFER TO SFDPSF FOR SPICE CONNECTION REQUIREMENT.
- 2 PROVIDE 10A FUSE FOR STREETLIGHT, UOM.
- 3 R/C (E) SL POLE AND R/C POLE FOUNDATION 3' BELOW GRADE.
- 4 REPLACE (E) FIXTURE WITH NEW FIXTURE, TYPE AS SHOWN. PAINT, REFURBISH (E) SL POLE AND ARM.
- 5 STREETLIGHT/TRAFFIC & SIGNAL COMBINATION POLE. REFER TO ET-SERIES DWGS FOR ADDITIONAL ELECTRICAL REQUIREMENT.
- 6 SLICE TO EXISTING SL CIRCUIT.
- 7 REFER TO ET SERIES DWG FOR SL CIRCUIT CONNECTION.
- 8 12 FEET POLE FOR FGP FIXTURE. BID ALTERNATE: 14 FEET POLE FOR F5-GLO FIXTURE.

NOTE:  
THIS AUTOCAD DRAWING HAS BEEN REVISED AND REPLOTTED SUBSEQUENT TO INTERNAL ENGINEERING APPROVAL AND SIGN-OFF. FOR THEIR SIGNATURES, SEE THE DRAWING PLOTTED AND ISSUED PREVIOUSLY DURING BIDDING. THE SIGNED DRAWING REMAINS VALID EXCEPT FOR THE CHANGES ONLY AS CLEARLY MARKED ON THIS DRAWING AND ISSUED UNDER THIS LATEST REVISION NUMBER AS SHOWN IN THE TABLE OF REVISIONS LOCATED AT THE LOWER LEFT CORNER OF THE DRAWING. ALL ISSUED REVISIONS SUBSEQUENT TO PREVIOUSLY PLOTTED DRAWING DURING BIDDING REMAIN VALID UNLESS SUPERSEDED BY LATER ISSUED REVISIONS. CHECK ALL ISSUED REVISIONS OF THIS DRAWING.



2	11/16/20	ONE UNBID PIED LIGHT RELOCATIONS	SL	11
1	3/5/19	POD FOR FURNISHING 200K CONDUIT	SL	11
TABLE OF REVISIONS				
NO.	DATE	DESCRIPTION	BY	APP.
THIS DRAWING WAS LAST MODIFIED: 01/28/20 03:43. BY:				

REFERENCE INFORMATION  
& FILE NO. OF SURVEYS



DESIGN & ENGINEERING  
PUBLIC WORKS  
CITY & COUNTY OF SAN FRANCISCO  
30 VANNESS AVENUE, 10TH FLOOR  
SAN FRANCISCO, CA 94102-5008

Section Mgr:	Philp Thom
Deputy Section Mgr:	Isabel Chapp
Division Mgr:	Patrick Pomeroy

DESIGNED:	DATE:
ZH/LD	09/16
DRAWN:	DATE:
ZH/LD	09/16
CHECKED:	DATE:
SL	09/16



SCALE:
1" = 20'
SHEET OF

2ND STREET STREETSCAPE IMPROVEMENTS PROJECT		CONTRACT NO.	1064J
STREET LIGHTING PLAN		REVISION NO.	E-3.0
2ND STREET		FILE NO.	106,288
DOW PLACE TO STILLMAN STREET		REV. NO.	2

Drawing Path: V:\LOCAL SECOND STREET STREETSCAPE IMPROVEMENTS\2 Design\Working\Drawings\SL\2064J.dwg  
 User: JLD  
 Plot Time: Wed, 09 Jun 2022 10:53:11 AM  
 Plot File: 2064J.dwg  
 V:\LOCAL SECOND STREET STREETSCAPE IMPROVEMENTS\2 Design\Working\Drawings\SL\2064J.dwg  
 User: JLD  
 Plot Time: Wed, 09 Jun 2022 10:53:11 AM  
 Plot File: 2064J.dwg