



SW-b = 1
 SW-23 = 1
 SW-24 = 94 LF.
 SW-27 = 25 LF.
 SW-28 = 7 LF.
 SW-30 = 4
 SW-34 = 2

PLAN
 SCALE: 1"=20'

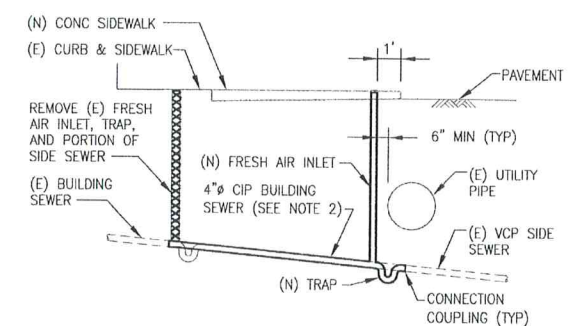


CASE A: UTILITY PIPE
 ENCROACHED ON TO SIDEWALK

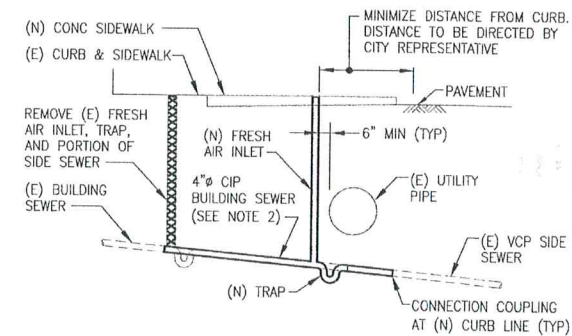

CASE B: UTILITY PIPE WITHIN
 SIDEWALK ALONG CURB LINE

NOTES:

- SEE R-DWGS FOR PROPOSED ROADWAY IMPROVEMENTS INCLUDING, BUT NOT LIMITED TO, RAISED CROSSWALKS, BUS ISLANDS, AND VARIOUS BUFFER ZONES.
- CONTRACTOR TO IDENTIFY ALL ACTIVE SIDE SEWERS WITHIN RAISED CYCLE TRACK LIMITS AND REPLACE ALL OF THEM FROM THE CURB TO THE MAIN SEWER. INVESTIGATION OF SIDE SEWERS SHALL BE COMPLETED PER CONTRACT SPECIFICATIONS PRIOR TO REPLACEMENT WORK.
- CONTRACTOR SHALL NOTIFY CITY REPRESENTATIVE IF EXISTING SIDE SEWER CONNECTIONS ARE DEFECTIVE. IF DETERMINED BY CITY REPRESENTATIVE THAT THE CONNECTION REQUIRES REPLACEMENT, SIDE SEWER CONNECTION TO RC SEWERS/RCP/BRICK SHALL BE CONSTRUCTED PER DETAILS ON SW-4. SIDE SEWER CONNECTIONS TO VCP SHALL BE PER CONTRACT SPECIFICATIONS. CITY REPRESENTATIVE MAY ALSO REQUIRE CONTRACTOR TO LINE (E) SIDE SEWERS WITH CIP.



ELEVATION
 DATUM
 SFVD13

RELOCATION OF (E) SIDE SEWER TRAP AND FRESH AIR INLET ASSEMBLY
 SCALE: NTS

REFERENCE INFORMATION & FILE NO. OF SURVEYS			DESIGN & ENGINEERING CITY & COUNTY OF SAN FRANCISCO SAN FRANCISCO PUBLIC WORKS 30 VAN NESS AVENUE, 5TH FLOOR SAN FRANCISCO, CA 94102 - 6028	Section Mgr: <i>Lesley Wong</i>	Date: 11/1/16		DESIGNED: DATE: J.K./A.S. 11/2016	DRAWN: DATE: A.KIRSCH 11/2016	CHECKED: DATE: G.FONG 11/2016	SCALE: AS NOTED	SHEET OF SHEETS	2ND STREET STREETSCAPE IMPROVEMENTS PROJECT 2ND STREET SEWER WORK STATION 27+50 TO 32+00 PLAN AND DETAIL.	CONTRACT NO. 1064J (R)
0 10/16 NO. DATE	ISSUED FOR BIDS DESCRIPTION			AS BY	LW APP.								DRAWING NO. SW-6