TRAFFIC CONTROL PLAN
1064J - 2ND ST IMPROVEMENTS PROJECT
GRIND AND PAVE WORK PLAN - 2ND ST FROM FOLSOM ST TO BRYANT ST

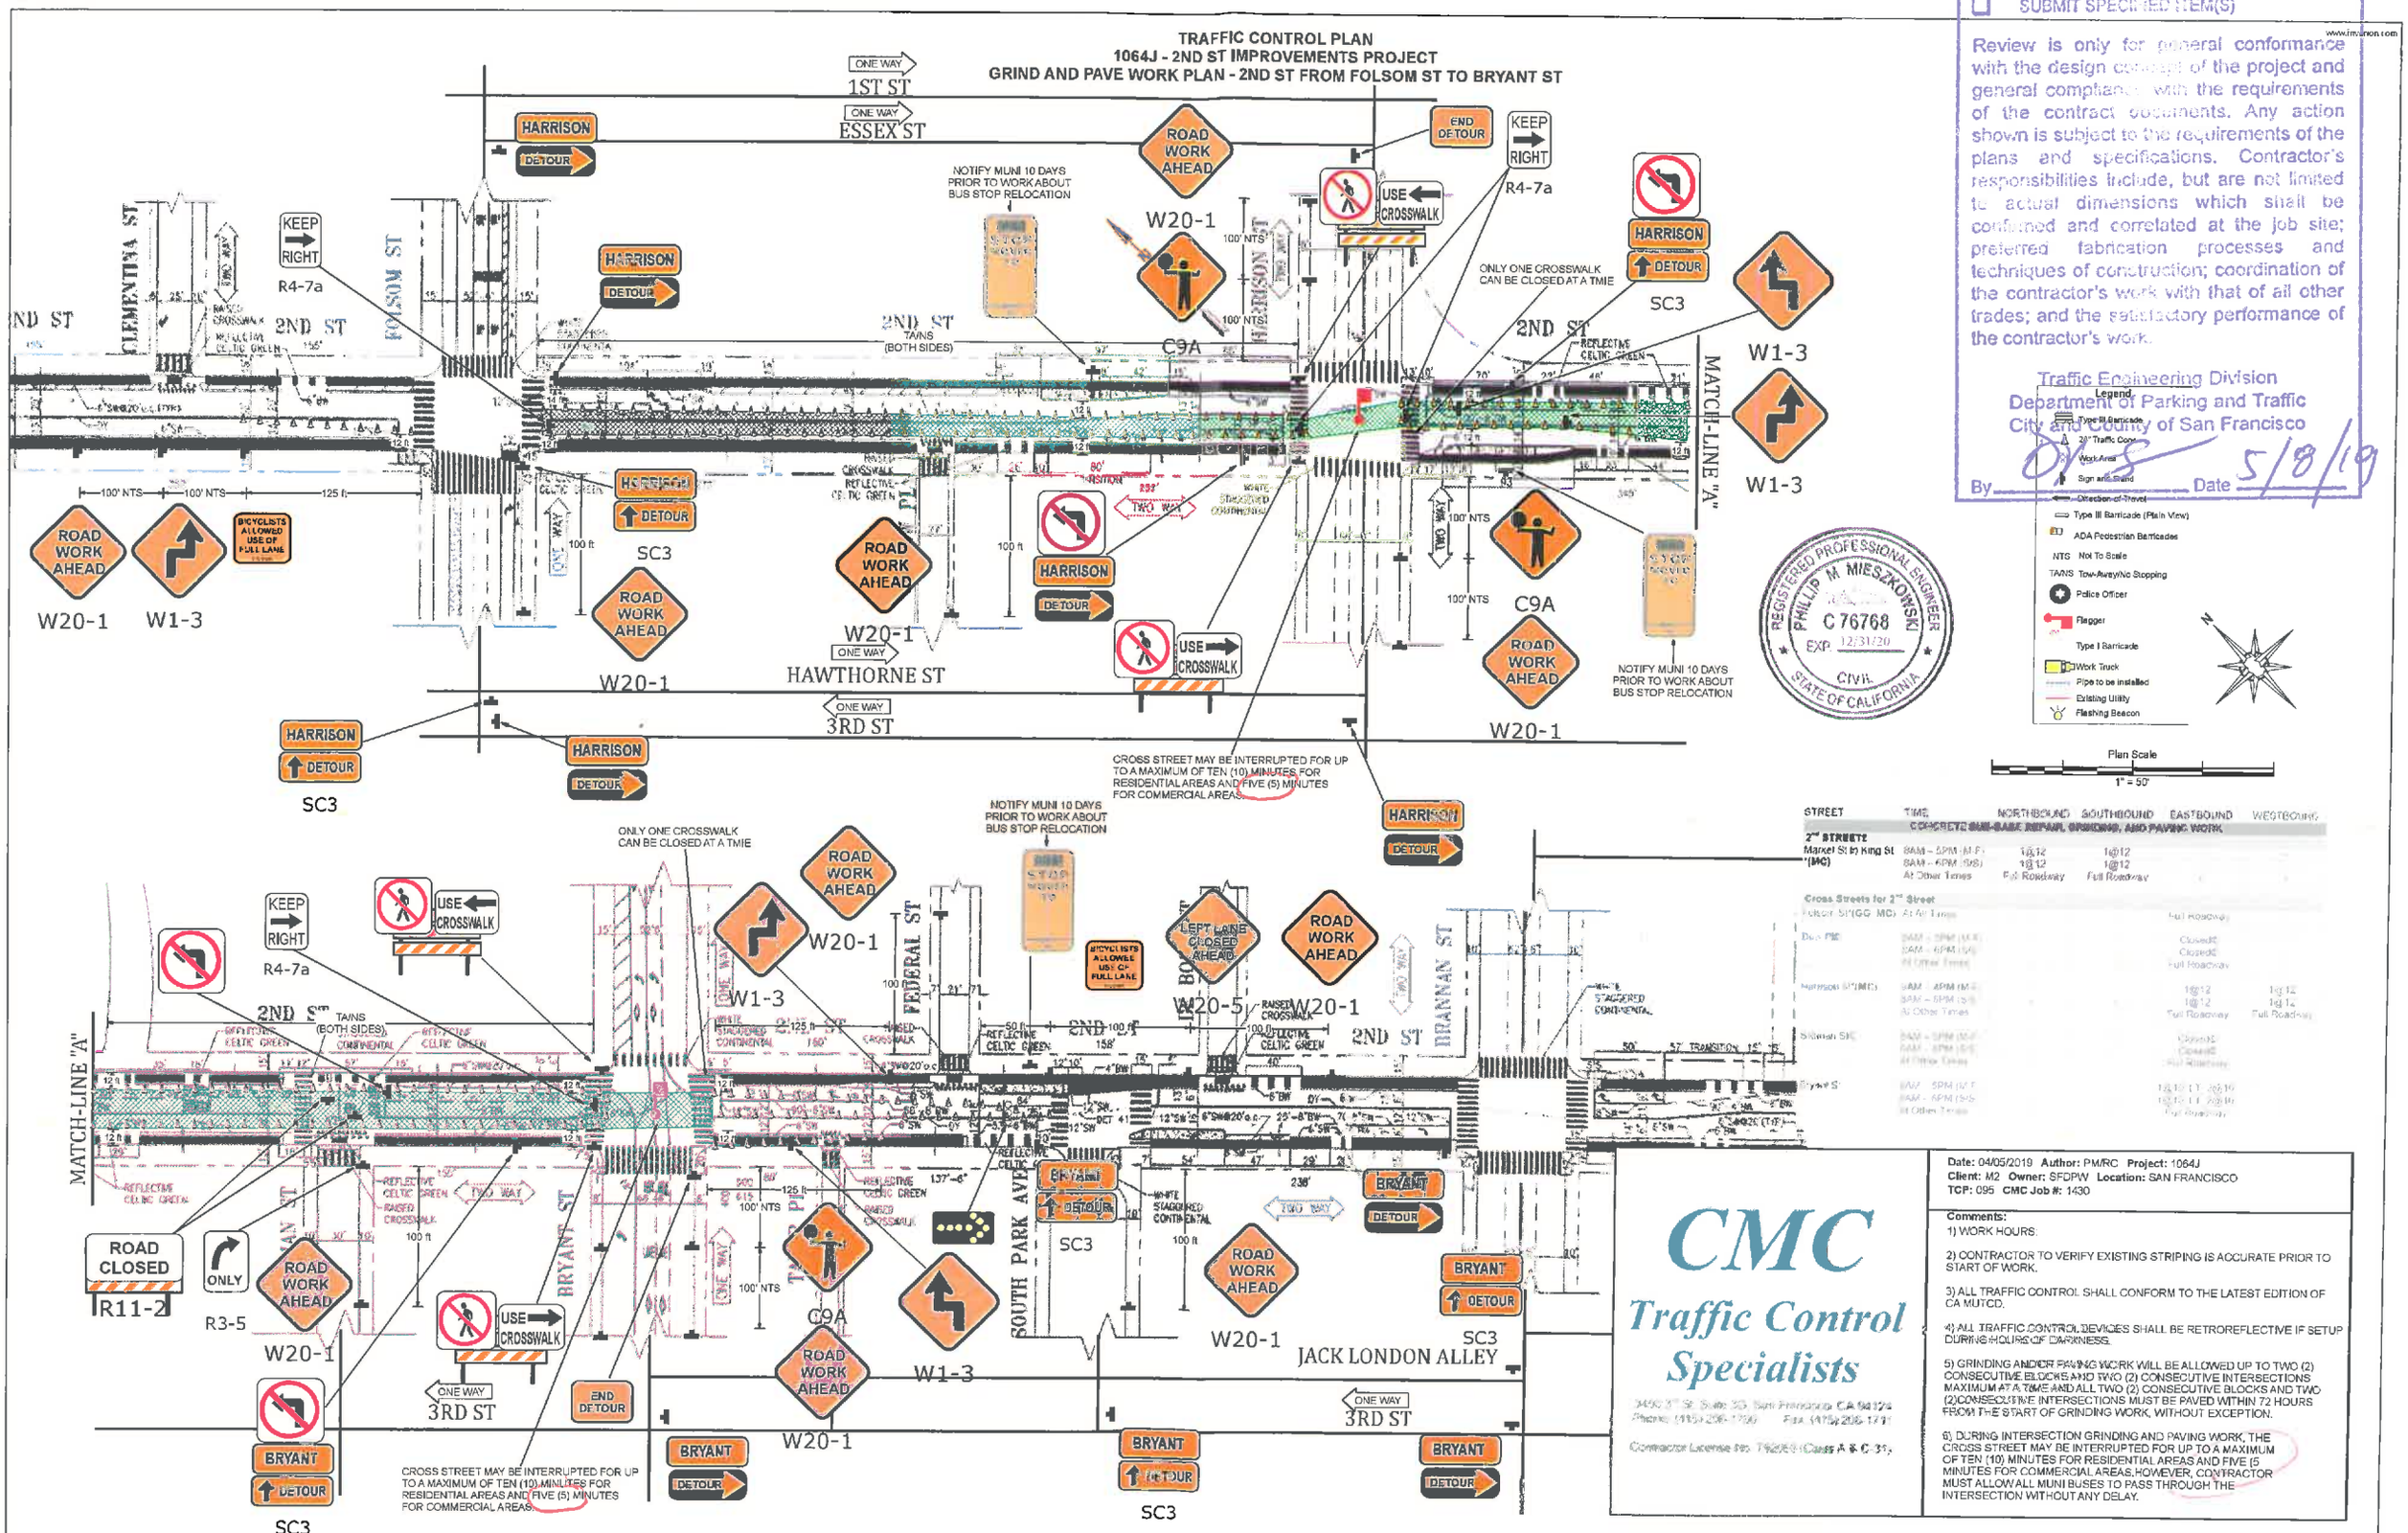

STREET	TIME	NORTHBOUND	SOUTHBOUND	EASTBOUND	WESTBOUND
CONCRETE SUB-BASE REPAIR, GRINDING, AND PAVING WORK					
2ND STREETS					
Market St to King St (MC)	8AM – 4PM (M-F)	1@12	1@12		
	8AM – 4PM (S/S)	1@12	1@12		
	At Other Times	Full Roadway	Full Roadway		
Cross Streets for 2nd Street					
Folsom St (GG MC)	At All Times			Full Roadway	
Bryant St	8AM – 4PM (M-F)			Closed*	
	8AM – 4PM (S/S)			Closed*	
	At Other Times			Full Roadway	
Harrison St (MC)	8AM – 4PM (M-F)			1@12	1@12
	8AM – 4PM (S/S)			1@12	1@12
	At Other Times			Full Roadway	Full Roadway
Brannan St	8AM – 4PM (M-F)			Closed*	
	8AM – 4PM (S/S)			Closed*	
	At Other Times			Full Roadway	
Bryant St	8AM – 4PM (M-F)			1@10 (T-F) 2@10	
	8AM – 4PM (S/S)			1@10 (T-F) 2@10	
	At Other Times			Full Roadway	

CMC
Traffic Control Specialists
3400 3rd St Suite 35 San Francisco CA 94124
Phone (415) 206-1750 Fax (415) 206-1771
Contractor License No. 762868 (Class A & C 31)

Date: 04/05/2019 **Author:** PM/RC **Project:** 1064J
Client: M2 **Owner:** SFDPW **Location:** SAN FRANCISCO
TCP: 095 **CMC Job #:** 1430

Comments:

1) WORK HOURS:

2) CONTRACTOR TO VERIFY EXISTING STRIPING IS ACCURATE PRIOR TO START OF WORK.

3) ALL TRAFFIC CONTROL SHALL CONFORM TO THE LATEST EDITION OF CA MUTCD.

4) ALL TRAFFIC CONTROL DEVICES SHALL BE RETROREFLECTIVE IF SETUP DURING HOURS OF DARKNESS.

5) GRINDING AND/OR PAVING WORK WILL BE ALLOWED UP TO TWO (2) CONSECUTIVE BLOCKS AND TWO (2) CONSECUTIVE INTERSECTIONS MAXIMUM AT A TIME AND ALL TWO (2) CONSECUTIVE BLOCKS AND TWO (2) CONSECUTIVE INTERSECTIONS MUST BE PAVED WITHIN 72 HOURS FROM THE START OF GRINDING WORK, WITHOUT EXCEPTION.

6) DURING INTERSECTION GRINDING AND PAVING WORK, THE CROSS STREET MAY BE INTERRUPTED FOR UP TO A MAXIMUM OF TEN (10) MINUTES FOR RESIDENTIAL AREAS AND FIVE (5 MINUTES FOR COMMERCIAL AREAS. HOWEVER, CONTRACTOR MUST ALLOW ALL MUNI BUSES TO PASS THROUGH THE INTERSECTION WITHOUT ANY DELAY.

REGISTERED PROFESSIONAL ENGINEER
PHILLIP M MIESZKOWSKI
C 76768
EXP. 12/31/20
CIVIL
STATE OF CALIFORNIA

☑ NO EXCEPTIONS TAKEN
☐ MAKE CORRECTIONS NOTED
☐ REJECTED
☐ REVISE AND RESUBMIT
☐ SUBMIT SPECIFIED ITEM(S)

Review is only for general conformance with the design concept of the project and general compliance with the requirements of the contract documents. Any action shown is subject to the requirements of the plans and specifications. Contractor's responsibilities include, but are not limited to actual dimensions which shall be confirmed and correlated at the job site; preferred fabrication processes and techniques of construction; coordination of the contractor's work with that of all other trades; and the satisfactory performance of the contractor's work.

Traffic Engineering Division
Department of Parking and Traffic
City and County of San Francisco

By OKS Date 5/8/19