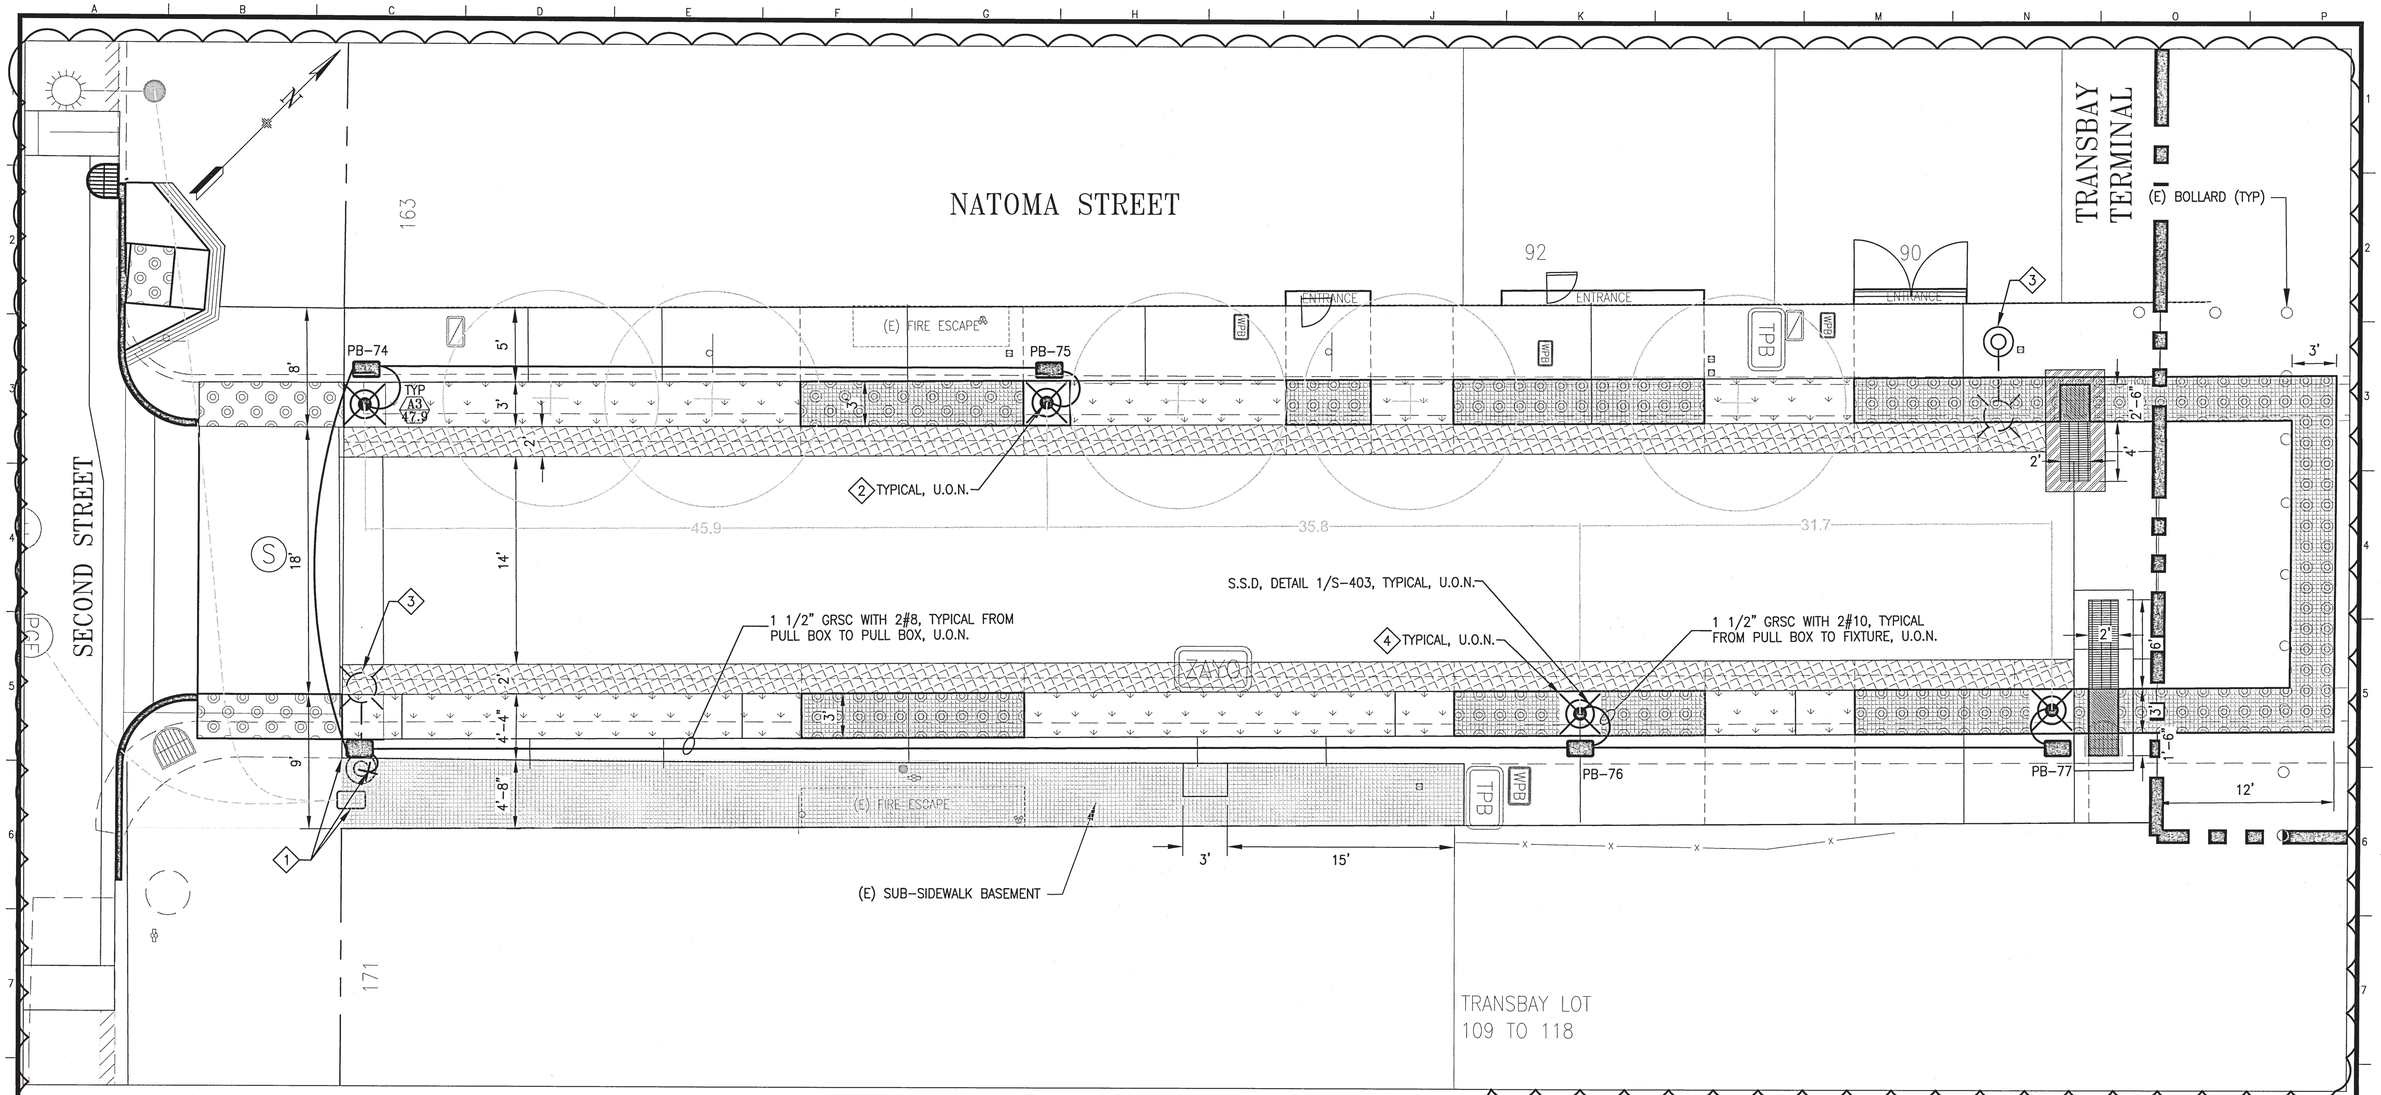

SHEET NOTES:

1. INTERCEPT EXISTING STREETLIGHT CONDUIT WITH A TYPE I PULL BOX ON SIDEWALK SURFACE. SPLICE NEW WIRES AND EXISTING WIRES IN EXISTING SUB-SIDEWALK BASEMENT PULL BOX.
2. PROVIDE 10A FUSE AND FUSE HOLDER FOR NEW PEDESTRIAN LIGHTS.
3. R/C STREET LIGHT POLE, ARM AND FIXTURE.
4. DETECTABLE SURFACE TILES SHALL BE OFFSET FROM OUTER EDGE OF ANCHOR BOLTS BY 6-INCHES. THE SIDEWALK AND STREET SIDE OF THE LIGHT SHALL HAVE NO DETECTABLE SURFACE TILES.

1

NOTE;
THIS AUTOCAD DRAWING HAS BEEN REVISED AND REPLOTTED SUBSEQUENT TO INTERNAL ENGINEERING APPROVAL AND SIGN-OFF. FOR THOSE SIGNATURES, SEE THE DRAWING PLOTTED AND ISSUED PREVIOUSLY DURING BIDDING. THE SIGNED DRAWING REMAINS VALID EXCEPT FOR THE CHANGES ONLY AS CLEARLY MARKED ON THIS DRAWING AND ISSUED UNDER THIS LATEST REVISION NUMBER AS SHOWN IN THE TABLE OF REVISIONS LOCATED AT THE LOWER LEFT CORNER OF THE DRAWING. ALL ISSUED REVISIONS SUBSEQUENT TO PREVIOUSLY PLOTTED DRAWING DURING BIDDING REMAIN VALID UNLESS SUPERSEDED BY LATER ISSUED REVISIONS. CHECK ALL ISSUED REVISIONS OF THIS DRAWING.

5' 2.5' 0 5' 10'
SCALE: 1" = 5'-0"

NO.	DATE	DESCRIPTION	BY	APP.
1	9/17/18	PCO #6 Natoma Extension	ST	SL

TABLE OF REVISIONS

REFERENCE INFORMATION & FILE NO. OF SURVEYS

SEAL OF THE CITY AND COUNTY OF SAN FRANCISCO

SAN FRANCISCO PUBLIC WORKS

BUREAU OF DESIGN & ENGINEERING
CITY & COUNTY OF SAN FRANCISCO
SAN FRANCISCO PUBLIC WORKS
30 VAN NESS AVENUE, 5TH FLOOR
SAN FRANCISCO, CA 94102 - 6028

		Date:
Section Mgr:	PHILIP THWIN	
Deputy Bureau Mgr:	IQBALBHAI DHAPA	
Bureau Mgr:	PATRICK RIVERA	

		DATE:
DESIGNED:	ST/RN	9/18
DRAWN:	ST	9/18
CHECKED:	SL/RN	9/18

REGISTERED PROFESSIONAL ENGINEER STEVEN T. LEE NO. E15417 ELECTRICAL STATE OF CALIFORNIA 9/19/18

SCALE: 1" = 5'-0"

SHEET OF SHEETS

2ND STREET STREETSCAPE IMPROVEMENTS PROJECT

STREET LIGHTING PLAN NATOMA STREET, 2ND ST TO TRANSBAY TERMINAL

CONTRACT NO. 1064J
DRAWING NO. NE-1
FILE NO. 106,287.1
REV. NO. 1