



1 2 3 4 5 6 7 8 9



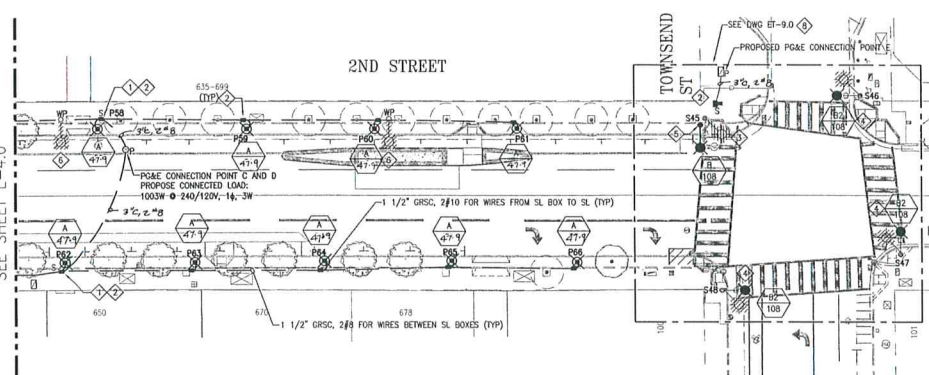

- SHEET NOTES:**
- ① PROVIDE 40A FUSE FOR STREETLIGHT CIRCUIT AND CONNECT (N) SL CIRCUIT TO THE (E) SL CIRCUIT. SEE SPDWSP #87,203 FOR WIRING DIAGRAM AND 87,204 FOR WIRES' SPACING DETAIL AND ANNOTATION, UON.
  - ② PROVIDE 10A FUSE FOR STREETLIGHT, UON.
  - ③ R/S (E) SL POLE AND R/C POLE FOUNDATION 3' BELOW GRADE.
  - ④ DISCONNECT (E) SL CIRCUIT. REMOVE AND REPLACE (E) FIXTURE WITH NEW, TYPE AS SHOWN. RECONNECT TO (E) CIRCUITS.
  - ⑤ REPLACE (E) FIXTURE WITH NEW FIXTURE, TYPE AS SHOWN. PAINT, REFURBISH (E) SL POLE AND ARM.
  - ⑥ TO BE DEMOLISHED BY PO&E. CONTRACTOR TO NOTIFY PO&E VIA SPUC-SUP-UP AFTER STREETSCAPE LIGHTING IN PROJECT AREA IS ACCEPTED BY SPUC-SUP.
  - ⑦ REPLACE EXISTING SL CIRCUIT.
  - ⑧ REFER TO ET SERIES DWG FOR SL CIRCUIT CONNECTION.

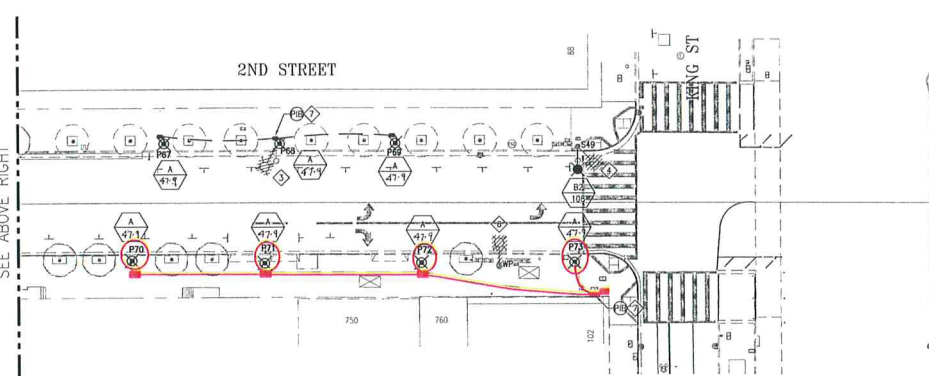

ET-34 PULL BOX TYPE III = 1 EA  
E-10 (Pullbox Type I) = 4 EA  
E-12 (1.5" GRS in Existing Sidewalk) = 230 LF



REFERENCE INFORMATION A FILE NO. OF SHEETS					DESIGN & ENGINEERING PUBLIC WORKS CITY AND COUNTY OF SAN FRANCISCO 30 VINTAGE AVENUE, 8TH FLOOR SAN FRANCISCO, CA 94102-8028		Section Mgr: <i>[Signature]</i>	Project Title: <i>[Signature]</i>	Date: <i>4/23/16</i>	DESIGNED: DATE: <i>09/16</i>		SCALE: <i>1" = 20'</i>	2ND STREET STREETSCAPE IMPROVEMENTS PROJECT		CONTRACT NO. <i>10641 (C)</i>	
NO. DATE DESCRIPTION BY APP.					City Engineer: <i>[Signature]</i>	Public Works: <i>[Signature]</i>	Checked: DATE: <i>09/16</i>	SHEET OF <i>17/16</i>	STREET LIGHTING PLAN 2ND STREET TOWNSEND STREET TO KING STREET	DRAWING NO. <i>E-5.0</i>						
THIS DRAWING WAS LAST MODIFIED: 08/22/16 14:36, BY: <i>[Signature]</i>															FILE NO. <i>106,290</i>	REV. NO.

*[Handwritten Signature]*  
2/14/18.

Project: 10641 - STREETSCAPE IMPROVEMENTS - 2nd Street, Townsend Street to King Street, San Francisco, CA 94102-8028  
Drawing: E-5.0 - STREET LIGHTING PLAN  
Scale: 1" = 20'  
Date: 09/16  
Sheet: 17 of 16  
Author: *[Signature]*  
Checker: *[Signature]*  
Engineer: *[Signature]*  
City Engineer: *[Signature]*  
Public Works: *[Signature]*  
Contract: 10641 (C)  
Drawing: E-5.0  
File: 106,290  
Rev: 1