


**SHEET NOTES:**



- 1 F/I SUB SIDEWALK L. BASEMENT SL PULL BOX.
- 2 PROVIDE 10A FUSE FOR STREETLIGHT, UON.
- 3 R/S (E) SL POLE AND R/C POLE FOUNDATION 3' BELOW GRADE.
- 4 REPLACE (E) FIXTURE WITH NEW FIXTURE, TYPE AS SHOWN. PAINT, REFURBISH (E) SL POLE AND ARM.
- 5 STREETLIGHT/TRAFFIC & SIGNAL COMBINATION POLE. REFER TO ET-SERIES DWGS FOR ADDITIONAL ELECTRICAL REQUIREMENT.
- 6 F/I CONDUIT AND WIRES IN SUB SIDEWALK SUB SIDEWALK BASEMENT, SIZE AS SHOWN.
- 7 REFER TO ET SERIES DWG FOR SL CIRCUIT CONNECTION.
- 8 SLICE TO EXISTING SL CIRCUIT.
- 9 INTERCEPT AND CUT (E) CONDUIT. SLICE (N) WIRES TO (E) SL CIRCUIT. PROVIDE (N) TYPE I PULL BOX AND 10A FUSE FOR SL.
- 10 FOR SUB-SIDEWALK FOUNDATION, REFER TO STRUCTURAL DWG AND DETAIL.
- 11 REFER TO STRUCTURAL DWG. FOR SUB-SIDEWALK BASEMENT FOUNDATION DETAIL.

E-10 (Pullbox Type I) = 12 EA  
E-12 (1.5" GRS) = 406 LF



NO.	DATE	DESCRIPTION	BY	APP.
TABLE OF REVISIONS				
THIS DRAWING WAS LAST MODIFIED: 09/23/16 14:36, BY: lduong				


REFERENCE INFORMATION  
& FILE NO. OF SURVEYS

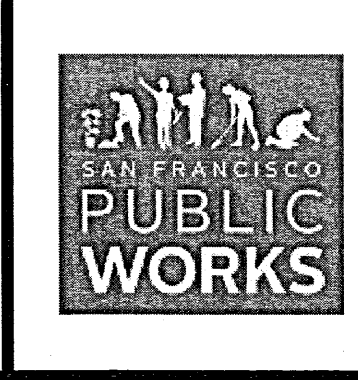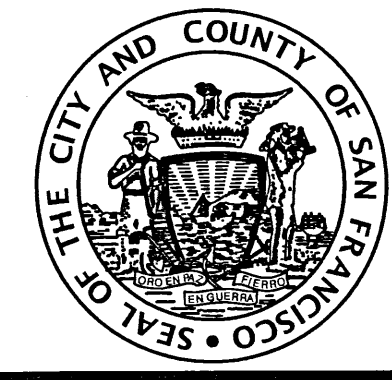

DESIGN & ENGINEERING  
PUBLIC WORKS  
CITY & COUNTY OF SAN FRANCISCO  
30 VAN NESS AVENUE, 5TH FLOOR  
SAN FRANCISCO, CA 94102 - 6028

Section Mgr: Philip Thwin  
Deputy Division Mgr: Iqbal Dhapa  
Division Mgr: Patrick Rivera  
Date: 9/23/16  
21 2016  
28/14/16

DESIGNED: DATE: 09/16  
ZH/LD  
DRAWN: DATE: 09/16  
ZH/LD  
CHECKED: DATE: 09/16  
SL

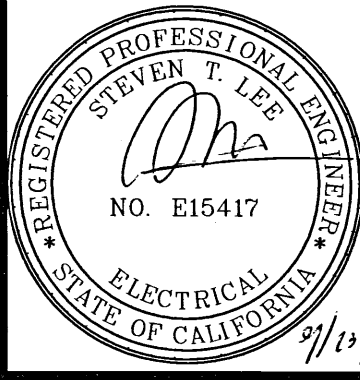

SCALE:  
1" = 20'  
SHEET OF SHEETS  
OF

2ND STREET STREETSCAPE  
IMPROVEMENTS PROJECT  
STREET LIGHTING PLAN  
2ND STREET  
NATOMA STREET TO FOLSOM STREET

CONTRACT NO.  
1064J (C2)  
DRAWING NO.  
E-2.0  
FILE NO.  
106,287  
REV. NO.

Drawing Path: V:\1064J\_SECOND\_STREET\_STREETSCAPE\_IMPROVEMENTS\2\_Design\Working Drawings\1064J\_E-1.0\1064J\_E-1.0.dwg  
Plot Time: Fri, 23 Sep 2016 - 2:45pm  
Model Units: Inches