


ET-34 PULL BOX TYPE III = 2 EA  
ET-40 1-2" GRS CONDUIT = 4 LF

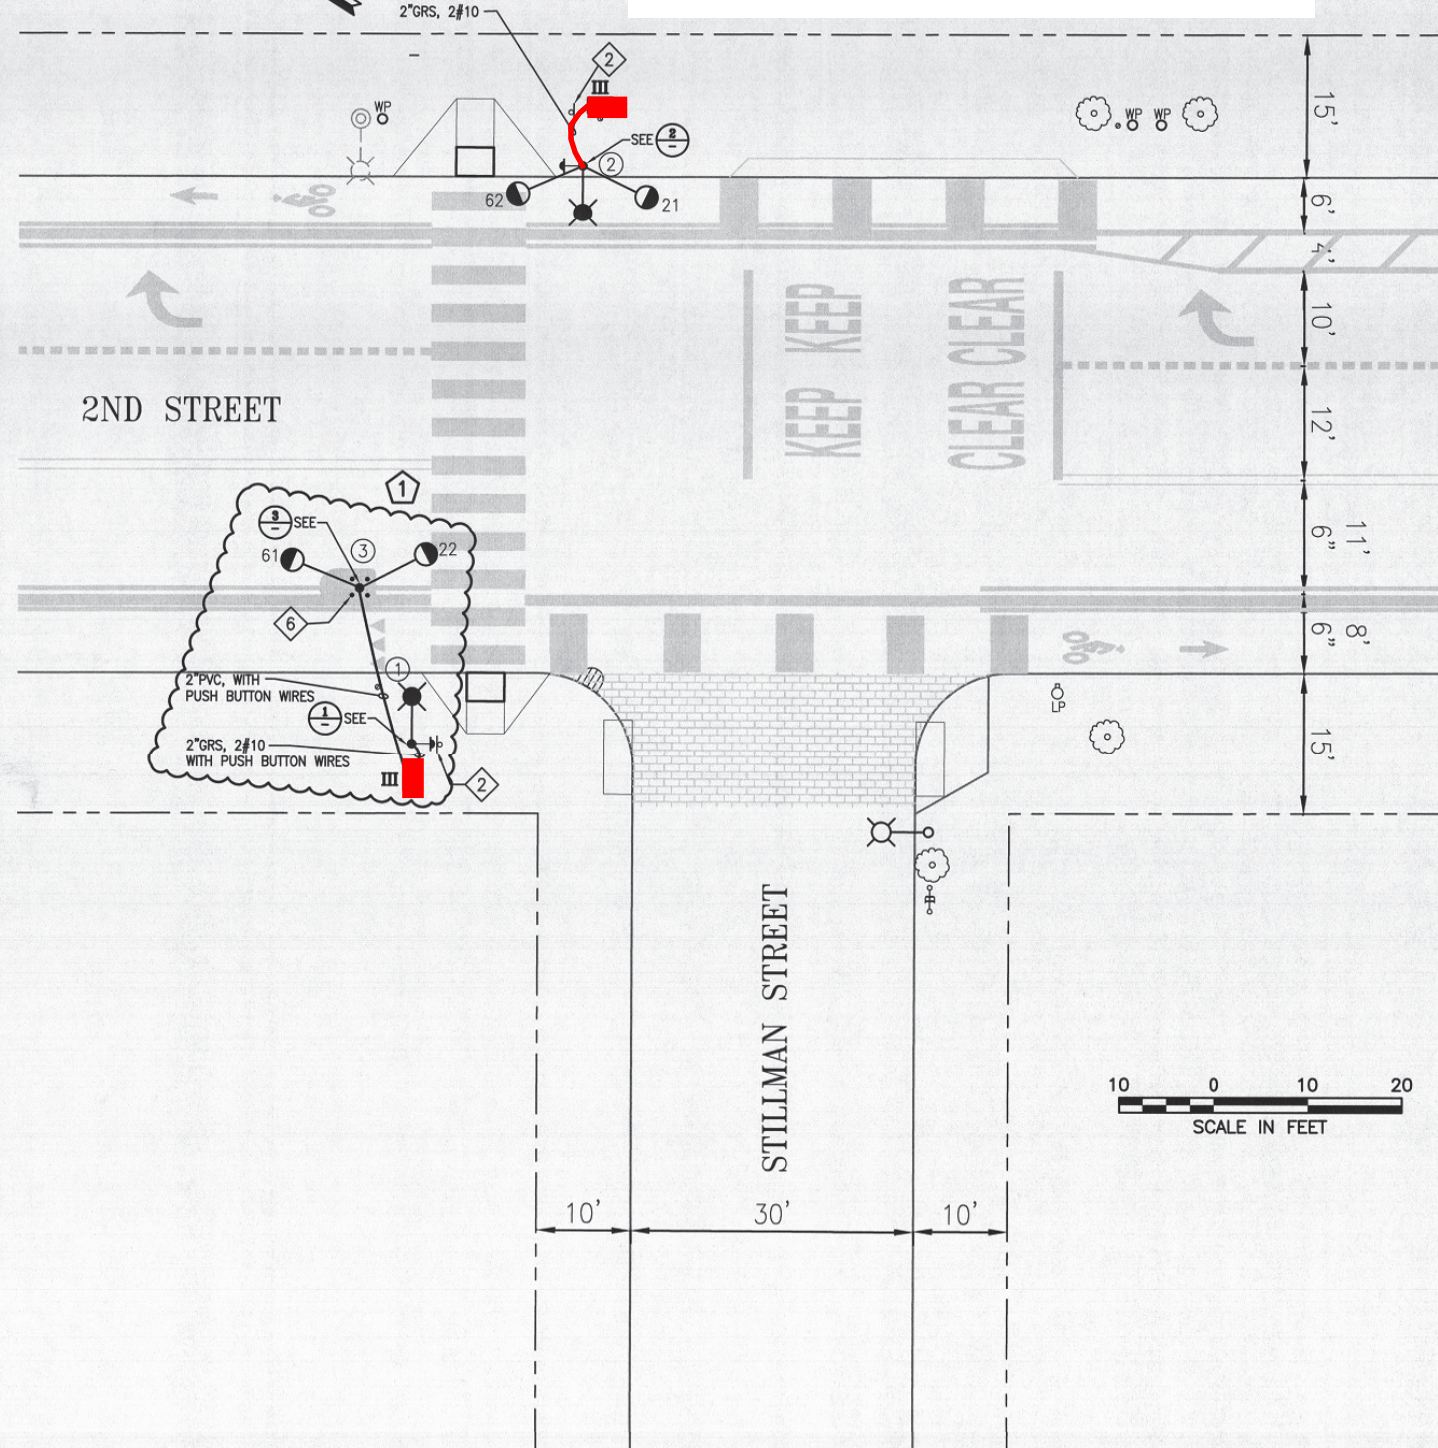


POLE AND EQUIPMENT SCHEDULE											
POLE No.	TYPE OF POLE	LUMINAIRE VOLTAGE/WATTAGE	VEHICLE SIGNAL					PEDESTRIAN SIGNAL			REMARKS
			No.	TYPE	MOUNTING	VISORS	LOUVERS	No.	TYPE	MOUNTING	
①	CITY STANDARD STREET LIGHT	4									APS ⑤
②	CITY STANDARD STREET LIGHT	4	21 62	①	SIDE MOUNT SIDE MOUNT						APS ⑤ SOLAR POWERED
③	1-A(13')		22 61	①	SIDE MOUNT SIDE MOUNT						SOLAR POWERED


SHEET NOTES:

- ① DUAL SIDED RECTANGULAR RAPID FLASHING BEACON WITH SOLAR PANELS, AC ALTERNATE POWER AND YELLOW COLOR FINISHING. MANUFACTURE: JSF TECHNOLOGIES CAT#: AB-9400 AC, YELLOW COLOR FINISHING OR APPROVED.
- ② R/S EXISTING SIGN POLE AND RELOCATE SIGNS ONTO POLES 1 & 2 AS APPLICABLE. CONTACT SFMTA SIGN SHOP AT 1508 BANCROFT AVENUE, SAN FRANCISCO; (415) 554-9786 PRIOR TO DELIVERY AND CONTACT TRAFFIC ENGINEER THROUGH THE CITY REPRESENTATIVE FOR SIGN RELOCATION.
- ③ ASSEMBLY R62E(CA) AND PEDESTRIAN PUSH BUTTON BELOW BEACON TO BE PROVIDED BY CITY FORCES.
- ④ REFER TO E SERIES DWG AND FIXTURE SCHEDULE E-0.2 FOR LUMINAIRE TYPE, VOLTAGE AND WATTAGE.
- ⑤ SOLAR POWER APS BUTTON AND WIRES WITH SAME RATING OF SL PROVIDED BY CITY FORCES.
- ⑥ F/I 4 NEW BOLLARDS AROUND POLE 3.

PHASE DIAGRAM



NOTE:  
THIS AUTOCAD DRAWING HAS BEEN REVISED AND REPLOTED SUBSEQUENT TO INTERNAL ENGINEERING APPROVAL AND SIGN-OFF. FOR THOSE SIGNATURES, SEE THE DRAWING PLOTTED AND ISSUED PREVIOUSLY DURING BIDDING. THE SIGNED DRAWING REMAINS VALID EXCEPT FOR THE CHANGES ONLY AS CLEARLY MARKED ON THIS DRAWING AND ISSUED UNDER THIS LATEST REVISION NUMBER AS SHOWN IN THE TABLE OF REVISIONS LOCATED AT THE LOWER LEFT CORNER OF THE DRAWING. ALL ISSUED REVISIONS SUBSEQUENT TO PREVIOUSLY PLOTTED DRAWING DURING BIDDING REMAIN VALID UNLESS SUPERSEDED BY LATER ISSUED REVISIONS. CHECK ALL ISSUED REVISIONS OF THIS DRAWING.

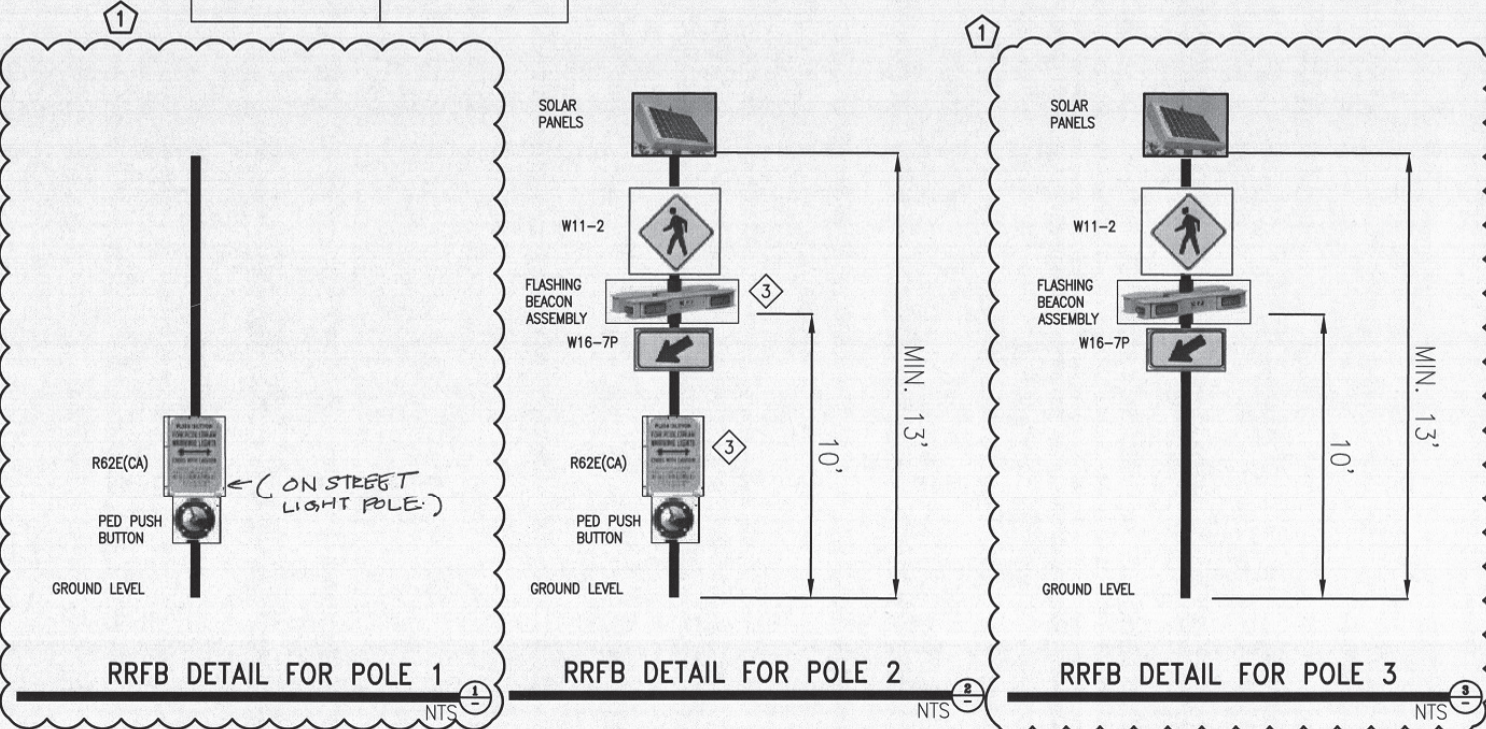

<table><tr><td>1</td><td>2/5/19</td><td>PCO #28 FURNISHING ZONE CHANGES</td><td>ST</td><td>SL</td></tr><tr><td>NO.</td><td>DATE</td><td>DESCRIPTION</td><td>BY</td><td>APP.</td></tr></table>	1	2/5/19	PCO #28 FURNISHING ZONE CHANGES	ST	SL	NO.	DATE	DESCRIPTION	BY	APP.	REFERENCE INFORMATION & FILE NO. OF SURVEYS						DESIGN & ENGINEERING CITY & COUNTY OF SAN FRANCISCO 30 VAN NESS AVENUE, 5TH FLOOR SAN FRANCISCO, CA 94102 - 6028		Section Mgr: Philip Thwin Deputy Bureau Mgr: Iqbal Dhapa Bureau Mgr: Patrick Rivera		Date: 09/16 Designed: SS/ZH Drawn: SS/ZH Checked: GD/SL				SCALE: AS SHOWN SHEET OF SHEETS OF		2ND STREET STREETSCAPE IMPROVEMENTS PROJECT 2ND STREET AND STILLMAN STREET TRAFFIC SIGNAL WORK		CONTRACT NO. 1064J DRAWING NO. ET-5.0 FILE NO. 106,274 REV. NO. 1	
1	2/5/19	PCO #28 FURNISHING ZONE CHANGES	ST	SL																										
NO.	DATE	DESCRIPTION	BY	APP.																										